




CompactLogix High Speed Counter / Encoder Module, 2/4 Channel

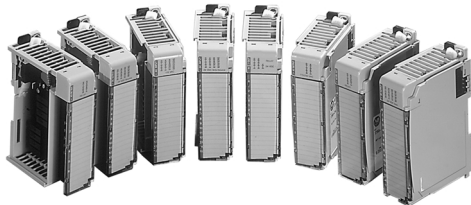

- High functionality in an economical platform
- DIN rail or panel mount for flexible installation options
- L1 and L2 controllers offer embedded I/O to lower costs, save panel space and simplify configuration
- Integrated Motion and Safety control (selected models) saves time and money on third-party hardware and integration
- Analogue, digital and specialty I/O modules cover a wide range of applications
- Advanced system integration via EtherNet/IP™ to plant-wide networks

Representative Photo Only  
(actual product may vary based on configuration selections)

**SPECIFICATIONS**

Product Series	CompactLogix (Bul. 1768 / 1769)
Component Type PLC & I/O	Specialty
Operating Temperature, Max	60 °C max
Operating Temperature, Min	0 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-40 °C min
Relative Humidity, Max	95 %RH
Humidity Type	Non-condensing

**REFERENCES**

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-