## Catalogue No: 800FC-3Z

### PENDANT STATION ENCLOSURE 3 HOLE

Operator Control Devices > Pushbuttons and Control Switches > Pushbuttons and Pilot Lights > Allen-Bradley 800F Pushbuttons and Pilot Lights > 800F Pendant Stations > Pendant Enclosure





#### ENCLOSURE 3 HOLE PENDANT

- The 800F line of 22.5 mm push buttons is designed and manufactured to demanding performance specifications to ensure you receive optimized durability and performance.
- 800FP operators are made of industrial grade thermoplastic for superior chemical resistance.
- 800FM operators are constructed of tough die cast zinc alloy, finished with chromate plating that can be used in the most arduous applications.

Representative Photo Only (actual product may vary based on configuration selections)


SPECIFICATIONS	
Product Series	800F
Component Type Pushbutton and Pilot Lights	Pushbutton Station Enclosure
Height	250 mm
Width	88 mm
Depth	76 mm
Mounting	22.5mm Mounting
Conduit Entry	1 x M20 entry
Operator Cutout(s)	3 x 22.5mm cutouts
Material, Body / Housing	Polycarbonate & PBT Blend material
Colour, Body / Housing	Yellow colour
Colour, Base	Yellow base
Mechanical Service Life	10000000 cycles
RoHS Approved	Yes
CE Marked	Yes
Operating Temperature, Max	70 °C max
Operating Temperature, Min	-25 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-40 °C min
Relative humidity, min	50 %RH
Relative Humidity, Max	95 %RH
IP Rating	IP66
Shock Acceleration (Max.)	100 g
Shock Duration (Max.)	11 ms
Vibration Acceleration (Max.)	10 m/s <sup>2</sup>
Vibration Displacement (Peak to Peak Max.)	1.52 mm
Vibration Frequency, Operational (Max.)	2000 Hz
Vibration Duration (Max.)	180 min



# Catalogue No: 800FC-3Z

### PENDANT STATION ENCLOSURE 3 HOLE

Operator Control Devices > Pushbuttons and Control Switches > Pushbuttons and Pilot Lights > Allen-Bradley 800F Pushbuttons and Pilot Lights > 800F Pendant Stations > Pendant Enclosure

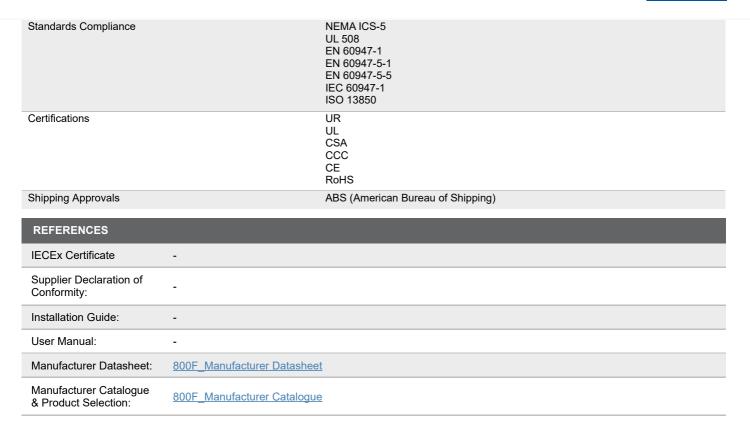



NHE