

## 18 AWG, PVC

### Features

- General purpose 18 AWG cable
- Highly visible yellow PVC jacket offers good oil and chemical resistance
- 2-, 3-, 4-, 5-, and 6-pin configurations
- Ratcheting coupling nut for vibration resistance




4-Pin Straight Mini Cordset

### Specifications


Certifications	UL Recognized and CSA Certified
<b>Mechanical</b>	
Coupling Nut Material	Epoxy-coated zinc
Housing Material	Molded oil-resistant TPE
Contact Material	Gold-plated palladium/nickel
Cable Type	Oil-resistant yellow PVC jacket, 18 AWG stranded copper, 300V; UL Recognized and CSA Certified
Bend Radius	10x diameter
Cable Diameter [mm (in.)]	2/c = 6 (0.24) 3/c = 6 (0.25) 4/c = 7 (0.27) 5/c = 8 (0.31) 6/c = 8 (0.32)
<b>Electrical</b>	
Cable Rating	UL AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 80C 300V FT1, UV oil and water resistant
Assembly Rating	2-pin = 300V, 10 A 3-pin = 300V, 10 A 4-pin = 300V, 7 A 5-pin = 300V, 5.6 A 6-pin = 300V, 5.6 A
<b>Environmental</b>	
Enclosure Type Rating	NEMA 4, 6P, 12, 13; IP67; 1200 psi washdown, IP69K
Temperature Rating [C (F)]	-20...+105° (-4...+221°)

### Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

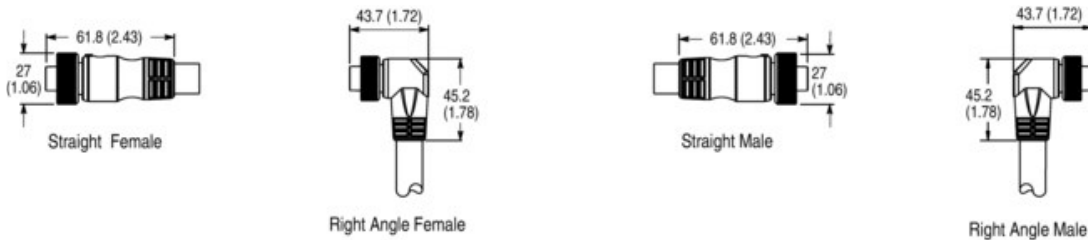

Example of Cordset













Example of Patchcord

### Mating Components & Accessories


Description	Cat. No.	Page
Coupling Adaptors	889A-NADPT	Accessories

## Pinout and Color Code

Color Code	Face View Pinout									
	2-Pin		3-Pin		4-Pin		5-Pin		6-Pin	
										
	Female	Male	Female	Male	Female	Male	Female	Male	Female	Male
A (US)	1 White 2 Black		1 Green 2 Black 3 White		1 Black 2 White	3 Red 4 Green	1 White 2 Red 3 Green	4 Orange 5 Black	1 White 2 Red 3 Green	4 Orange 5 Black 6 Blue
B (Auto)	—		1 Green 2 Red/Black Tr 3 Red/White Tr		1 Red/Black Tr 2 Red/White Tr	3 Red 4 Green	1 Red/White Tr 2 Red 3 Green 4 Red/Yellow Tr 5 Red/Black Tr		—	
C (IEC)	—		—		1 Black 2 Blue	3 Brown 4 White	1 Black 2 Blue 3 Grey	4 Brown 5 White	—	

## Product Selection


### Cordsets



No. of Pins	Assembly Rating	Color Code	Cat. No.*			
			Straight Female	Right Angle Female	Straight Male	Right Angle Male
2-Pin	300V, 10 A	A	889N-F2AEC-6F	889N-R2AEC-6F	889N-U2AEC-6F	889N-V2AEC-6F
3-Pin		A	889N-F3AEC-6F	889N-R3AEC-6F	889N-U3AEC-6F	889N-V3AEC-6F
		B	889N-F3AEA-6F	889N-R3AEA-6F	889N-U3AEA-6F	889N-V3AEA-6F
4-Pin	300V, 7 A	A	889N-F4AEC-6F	889N-R4AEC-6F	889N-U4AEC-6F	889N-V4AEC-6F
		B	889N-F4AEA-6F	889N-R4AEA-6F	889N-U4AEA-6F	889N-V4AEA-6F
		C	889N-F4AE-6F	889N-R4AE-6F	889N-U4AE-6F	889N-V4AE-6F
5-Pin	300V, 5.6 A	A	889N-F5AEC-6F	889N-R5AEC-6F	889N-U5AEC-6F	889N-V5AEC-6F
		B	889N-F5AEA-6F	889N-R5AEA-6F	889N-U5AEA-6F	889N-V5AEA-6F
		C	889N-F5AE-6F	889N-R5AE-6F	889N-U5AE-6F	889N-V5AE-6F
6-Pin		A	889N-F6AE-6F	889N-R6AE-6F	889N-U6AE-6F	889N-V6AE-6F

\* The 6F at the end of the cat. no. is for 6 ft cable length. Replace the 6 with 12 (12 ft), or 20 (20 ft) for other standard cable lengths.

### Patchcords



No. of Pins	Assembly Rating	Cat. No.‡			
		Straight Female Straight Male	Straight Female Right Angle Male	Right Angle Female Straight Male	Right Angle Female Right Angle Male
2-Pin	300V, 10 A	889N-F2AENU-6F	889N-F2AENV-6F	889N-R2AENU-6F	889N-R2AENV-6F
3-Pin		889N-F3AENU-6F	889N-F3AENV-6F	889N-R3AENU-6F	889N-R3AENV-6F
4-Pin	300V, 7 A	889N-F4AENU-6F	889N-F4AENV-6F	889N-R4AFNU-6F	889N-R4AENV-6F
5-Pin	300V, 5.6 A	889N-F5AENU-6F	889N-F5AENV-6F	889N-R5AENU-6F	889N-R5AENV-6F
6-Pin		889N-F6AENU-6F	889N-F6AENV-6F	889N-R6AENU-6F	889N-R6AFNV-6F

‡ The **6F** at the end of the cat. no. is for 6 ft cable length. Replace the **6** with **3** (3 ft), **12** (12 ft), or **20** (20 ft) for other standard cable lengths.

**Note:**Stainless steel connector versions may be ordered by adding an **S** to the cat. no., e.g., **889NS-F3AEC-6F**.