


# FLUSH MOUNT PRESENCE DETECTOR, 360 DEGREES



55-465

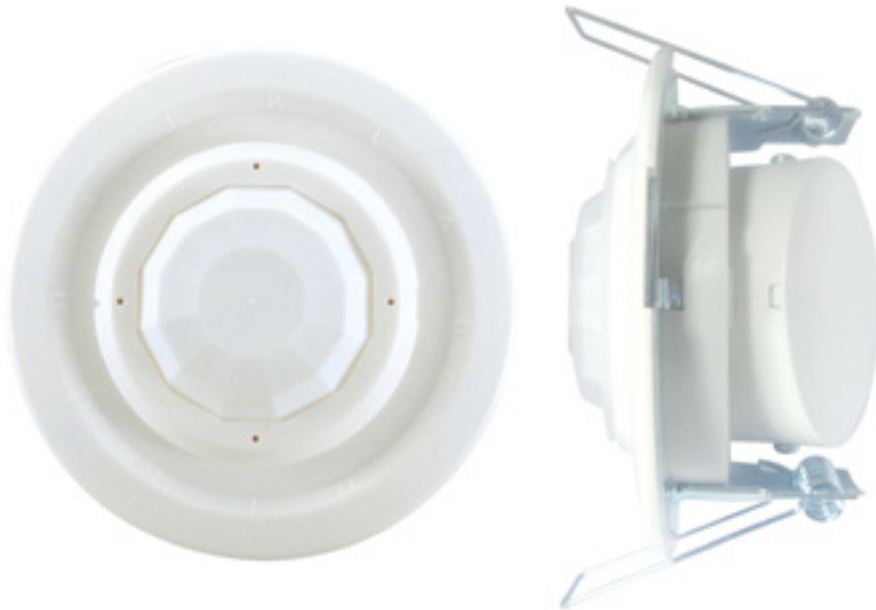

Description	Colour	Model
Flush Mount Presence Detector	White	55-465

- Adjustable time, distance & Lux
- Quad element sensor
- Built-in walk test function
- Cutout diameter: 65mm
- Polycarbonate construction
- Minimum load 10W

## TECHNICAL DATA

<b>Mounting</b>	Flush
<b>Sensor Type</b>	Passive IR
<b>Detection Range</b>	6m Diameter at a 2.4m Mounting Height
<b>Detection Angle</b>	360° Adjustable with Lens Shield
<b>Time on Adjustment</b>	6 sec to 12 mins
<b>Lux Setting (Lux)</b>	5 to 900
<b>Load</b>	- 10A Max Voltage Free Contact - 20W – 2300W for Incandescent Light - 20W – 1100W for Halogen Light - 20W – 300W for Low Voltage Halogen Light - 20W – 400W for Fluorescent Light - LED Lamp Max 600W
<b>Voltage</b>	240V AC 50Hz
<b>Operating Temperature</b>	-10°C to +45°C
<b>Environmental Protection</b>	IP40

