



# Arteor™ Single pole switches


Cat. No(s): 572 009/010/041/509/510/541  
573 020/021/022/023/024/025/070  
573 120/121/122/123/124/125/170



572 009/509



572 041/541













573 070/170

CONTENTS	Page
1. Use.....	1
2. Range.....	1
3. Preparation.....	2
4. Overall dimensions.....	2
5. Connection.....	2
6. Operation.....	2
7. Technical characteristics.....	2
8. Cleaning.....	2
9. Conformity - Approvals.....	3

## 1. USE

General lighting control mechanisms.

## 2. RANGE


	Designation	Finishes		No. of modules	Connection method	Weight (g)	Characteristics
		White	Magnesium				
	Single pole switch one way (square)	572 009	572 509	1	with screws	21	20 AX - 250 VAC
	Single pole switch one way (round left)	573 020	573 120	1	with screws	20	20 AX - 250 VAC
	Single pole switch one way (round middle)	573 021	573 121	1	with screws	20.5	20 AX - 250 VAC
	Single pole switch one way (round right)	573 022	573 122	1	with screws	19.9	20 AX - 250 VAC
	Single pole switch one way (square)	572 041	572 541	2	with screws	28.8	20 AX - 250 VAC
	Single pole switch one way (round)	573 070	573 170	2	with screws	27.4	20 AX - 250 VAC
	Single pole switch two way (square)	572 010	572 510	1	with screws	23.5	20 AX - 250 VAC
	Single pole switch two way (round left)	573 023	573 123	1	with screws	22.5	20 AX - 250 VAC
	Single pole switch two way (middle)	573 024	573 124	1	with screws	23.1	20 AX - 250 VAC
	Single pole switch two way (round right)	573 025	573 125	1	with screws	22.5	20 AX - 250 VAC

# Arteor™ Single pole switches


Cat. No(s): 572 009/010/041/509/510/541  
573 020/021/022/023/024/025/070  
573 120/121/122/123/124/125/170

## 3. PREPARATION

The mechanisms can be flush-mounted or surface-mounted

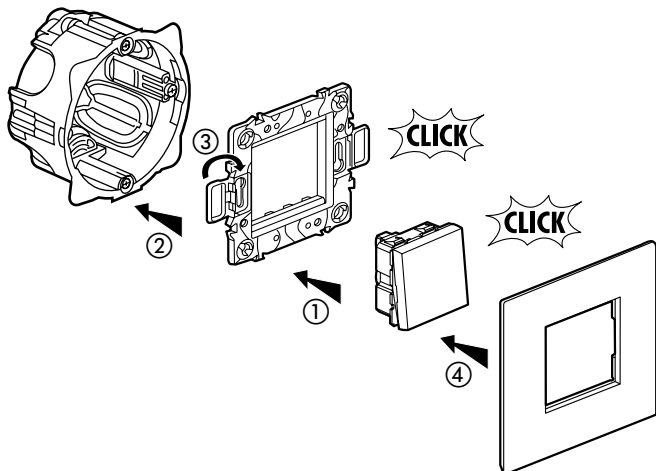


## 4. OVERALL DIMENSIONS

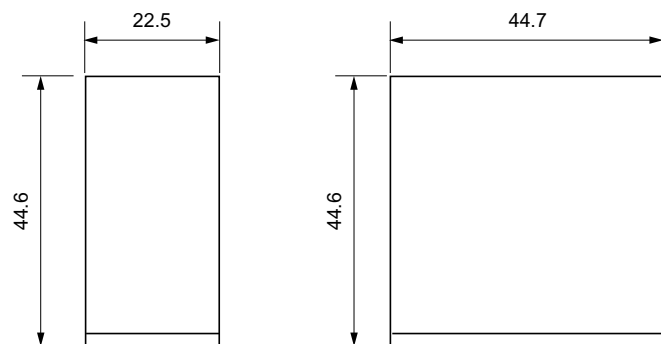

572 009/010/509/510  
573 020/021/022/023/024/025  
573 120/121/122/123/124/125

572 041/541  
573 070/170



## 5. CONNECTION

Terminals: with screws  
Capacity: 4 x 2.5 mm<sup>2</sup> or 2 x 4 mm<sup>2</sup> or 1 x 6 mm<sup>2</sup>  
Stripping: 10 mm  
Screwdriver: 4 mm flat-blade up to 5.5 mm

## 6. OPERATION

Switching mechanism.

## 7. TECHNICAL CHARACTERISTICS

### 7.1 Mechanical characteristics

Impact tests: IK 04  
Protection by solid bodies / liquids: IP 40 (mounted)  
IP 20 (alone)

### 7.2 Material characteristics

Rocker: Polycarbonate  
Base: Polycarbonate  
Basket: Polypropylene

### 7.3 Electrical characteristics

Voltage: 250 VAC  
Current: 20 AX  
Self-extinguishing: 650° C / 30 s

### 7.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C  
Operating temperatures: - 5° C to + 50° C

## 8. CLEANING

Surface cleaning with a cloth  
Do not use: acetone, tar remover, trichloroethylene

Resistance to the following cleaning agents: Hexane (EN-60669-1), Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

# Arteor™

## Single pole switches

Cat. No(s): 572 009/010/041/509/510/541  
573 020/021/022/023/024/025/070  
573 120/121/122/123/124/125/170

### 9. CONFORMITY - APPROVALS

Approvals in process:

	IECEE	PAI	SABS	PSB	SONCAP	KEN	SASO
572 009 - 572 509	x	x	x	x	x	x	x
572 010 - 572 510	x	x	x	x	x	x	x
572 041 - 572 541	x	x	x	x			x
573 020 - 573 120	x	x	x	x	x	x	x
573021 - 573 121	x	x	x	x	x	x	x
573 022 - 573 122	x	x	x	x	x	x	x
573 023 - 573 123	x	x	x	x	x	x	x
573 024 - 573 124	x	x	x	x	x	x	x
573 025 - 573 125	x	x	x	x	x	x	x
573 070 - 573 170	x	x	x	x			x