



## Arteor™ Painted graphite plates for US standard


Cat. No(s).: 575 242/252/262/272/282/292/302/322  
575 632/642/652/662/672  
576 722

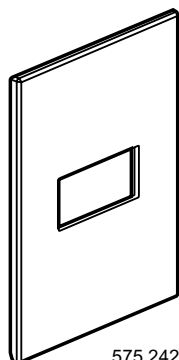

575 242

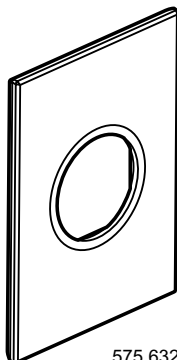

575 632

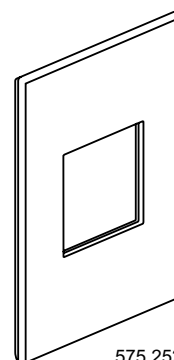














575 252


### 1. USE

Plates for covering mechanisms.


### 2. RANGE

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	1 module plate square (2" x 4")	575 242	1	With clips	41.5
	1 module plate square vertical (2" x 4")	576 722	1	With clips	41.5
	2 modules plate round (2" x 4")	575 632	2	With clips	42.2
	2 modules plate round (4" x 4")	575 642	2	With clips	58
	2 modules plate square (2" x 4")	575 252	2	With clips	41
	2 modules plate square (4" x 4")	575 262	2	With clips	57
	3 modules plate round (2" x 4")	575 652	3	With clips	38.2
	3 modules plate round (4" x 4")	575 662	3	With clips	53.5
	3 modules plate square (2" x 4")	575 272	3	With clips	36.1
	3 modules plate square (4" x 4")	575 282	3	With clips	53.7
	2 x 3 modules plate round (4" x 4")	575 672	2 x 3	With clips	47.8
	2 x 3 modules plate square (4" x 4")	575 302	2 x 3	With clips	44
	4 modules plate square (4" x 4")	575 292	4	With clips	49

## 2. RANGE (suite)

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	4 modules plate socket square (4" x 4")	575 322	4	With clips	32.6

## 3. OVERALL DIMENSIONS

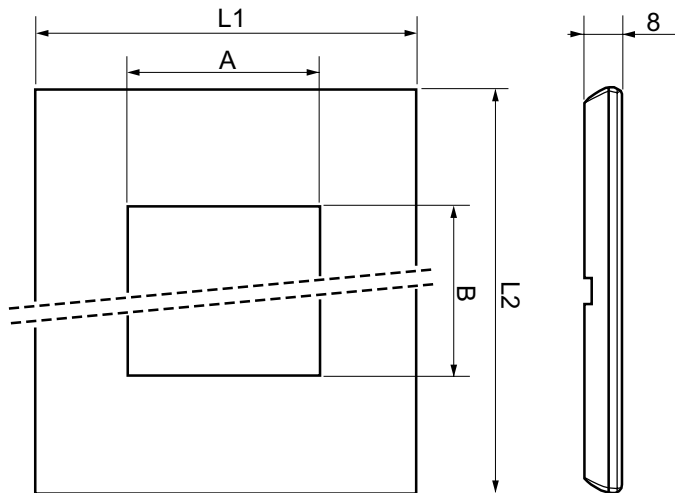

Cat. No.	L1	L2	A	B	
575 242	92	127	45.4	22.8	
575 252				45.4	
575 262	127			68	
575 272	92		68	45.4	
575 282	127		90.8	2 x 45.4	68
575 292			45.4	90.8	
575 302			45.4	90.8	
575 322			45.4	90.8	
575 632	92		Ø 45.4		
575 642	127				
575 652	92	45.4	68		
575 662	127	68	45.4		
575 672		2 x 45.4	68		
576 722	92	22.8	45.4		

## 4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g.: wall paper). Easy to remove with a screwdriver.

No flatness defect of more than 1.5 mm, in a periphery of 10 cm around the installed flush box.

Protection film must be removed only once site work is fully completed.

## 5. TECHNICAL CHARACTERISTICS

## 5.1 Mechanical characteristics

Impact tests: IK 04

## 5.2 Material characteristics

Front plate: polycarbonate

Under plate: polycarbonate

## 5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C

Operating temperatures: - 5° C to + 50° C

## 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

## 6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

## 6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfanios, Bactily sine, Hydrogen peroxyde (30 %).

## 7. SPECIAL USE

Arteor plates must not be painted.