# **PHILIPS** Lighting



# **MASTER PL-C 2 Pin**

### MASTER PL-C 26W/830/2P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

#### Warnings and Safety

- $\cdot$  Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- $\cdot$  Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**


l Information		Luminous Flux (Rated) (Nom)	1800 lm	
ap-Base	G24D-3 [ G24d-3]	Color Designation	Warm White (WW)	
fe To 10% Failures (Nom)	6500 h	Correlated Color Temperature (Nom)	3000 K	
ife to 50% Failures (Nom)	10000 h	Luminous Efficacy (rated) (Nom)	68 lm/W	
SF 2000 h Rated	99 %	Color Rendering Index (Nom)	82	
LSF 4000 h Rated	98 %	LLMF 2000 h Rated	92 %	
LSF 6000 h Rated	92 %	LLMF 4000 h Rated	87 %	
LSF 8000 h Rated	78 %	LLMF 6000 h Rated	83 %	
		LLMF 8000 h Rated	81 %	
Light Technical				
Color Code	830 [ CCT of 3000K]	Operating and Electrical	Operating and Electrical	
Luminous Flux (Nom)	1800 lm	Power (Nom)	26.5 W	

#### **MASTER PL-C 2 Pin**

Lamp Current (Nom)	0.335 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	2 Pins
Approval and Application	
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	32 kWh

Product Data				
Full product code	871150027090000			
Order product name	MASTER PL-C 26W/830/2P 1CT/5X10BOX			
EAN/UPC - Product	8711500270900			
Order code	927906183001			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	50			
Material Nr. (12NC)	927906183001			
Net Weight (Piece)	64.300 g			
ILCOS Code	FSQ-26/30/1B-I-G24d=3			


#### Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)	
MASTER PL-C 26W/830/2P	27.1 mm	27.1 mm	130.5 mm	149.0 mm	171.4 mm	
1CT/5X10BOX						

#### PL-C 26W/830/2P

#### Photometric data

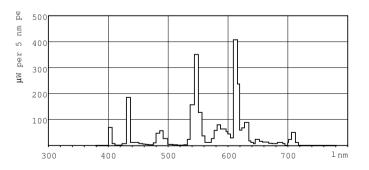




LDPO\_PLC2P\_830-Spectral power distribution Colour


## LDPB\_PLC2P\_830-Spectral power distribution B/W

#### **MASTER PL-C 2 Pin**


Lifetime

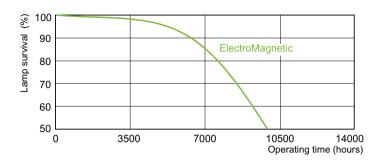



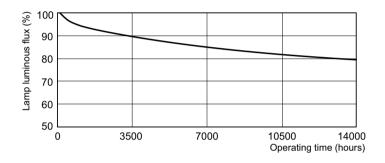

LDLM\_PLC2P\_0001-Lumen maintenance diagram



LDLE\_PLC2P\_0002-Life expectancy diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, July 29 - data subject to change