



MASTER PL-S 2 Pin

MASTER PL-S 9W/827/2P 1CT/10

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

Warnings and Safety

- \cdot Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General information | |
|----------------------------|---------------------|
| Cap-Base | G23 [G23] |
| Life To 10% Failures (Nom) | 0 h |
| Life to 50% Failures (Nom) | 10000 h |
| LSF 2000 h Rated | 99 % |
| LSF 4000 h Rated | 98 % |
| LSF 6000 h Rated | 95 % |
| LSF 8000 h Rated | 86 % |
| | |
| Light technical | |
| Color Code | 827 [CCT of 2700K] |
| Luminous Flux (Nom) | 600 lm |
| | · |

| Luminous Flux (Rated) (Nom) | 583 lm |
|------------------------------------|--------------------|
| Color Designation | Incandescent White |
| Correlated Color Temperature (Nom) | 2700 K |
| Luminous Efficacy (rated) (Nom) | 67 lm/W |
| Color Rendering Index (Nom) | 82 |
| LLMF 2000 h Rated | 94 % |
| LLMF 4000 h Rated | 91 % |
| LLMF 6000 h Rated | 89 % |
| LLMF 8000 h Rated | 86 % |
| | |
| Operating and electrical | |
| Power (Nom) | 8.7 W |


Datasheet, 2022, January 14 data subject to change

MASTER PL-S 2 Pin

| Lamp Current (Nom) | 0.170 A |
|-------------------------------|---------|
| | |
| Temperature | |
| Design Temperature (Nom) | 28 ℃ |
| | |
| Controls and dimming | |
| Dimmable | No |
| | |
| Mechanical and housing | |
| Cap-Base Information | 2 Pins |
| | |
| Approval and application | |
| Mercury (Hg) Content (Nom) | 1.4 mg |
| Energy Consumption kWh/1000 h | 11 kWh |
| | |

| Product data | |
|---------------------------------|------------------------------|
| Full product code | 871869960700500 |
| Order product name | MASTER PL-S 9W/827/2P 1CT/10 |
| EAN/UPC - Product | 8718699607005 |
| Order code | 927936082765 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 927936082765 |
| Net Weight (Piece) | 32.000 g |
| ILCOS Code | FSD-9/27/1B-I-G23 |
| | |


Dimensional drawing




MASTER PL-S 9W/827/2P 1CT/10



Photometric data

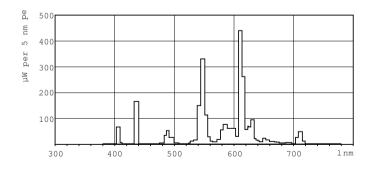


LDPB_PLS2PLM_827-Spectral power distribution B/W

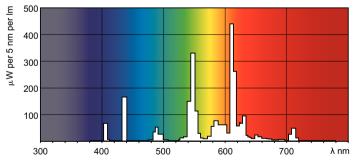

LDPO_PLS2PLM_827-Spectral power distribution Colour

MASTER PL-S 2 Pin

Lifetime

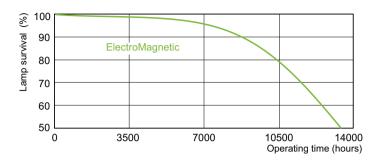



LDLE_PLS2PLM_0002-Life expectancy diagram

LDLE_PLS2PLM_0001-Life expectancy diagram



LDLM_PLS2PLM_0001-Lumen maintenance diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.