



TL-D Standard Colours

TL-D 10W/33-640 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Controls and Dimming	
Cap base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	Yes
Life to 50% failures (nom.)	5000 h		
Light Technical		Approval and Application	
Colour Code	33-640	Energy efficiency label (EEL)	B
Lamp Luminous Flux 25°C EL (Nom)	440 lm	Mercury (Hg) content (nom.)	8.0 mg
Colour Designation	Cool White (CW)		
Lumen maintenance 2,000 hours (nom.)	85 %	Product Data	
Lumen maintenance 5,000 hours (nom.)	80 %	Full product code	871150064128100
Colour Temperature, horizontal (Nom)	4100 K	Order product name	TL-D 10W/33-640 1SL/25
Colour Rendering Index,horiz (Nom)	60	EAN/UPC – product	8711500641281
Operating and Electrical		Order code	928024003331
Power (Rated) (Nom)	10 W	Local code	TLD10W33PK25
Lamp current (nom.)	0.230 A	SAP numerator – quantity per pack	1
Voltage (Nom)	46 V	Numerator – packs per outer box	25
		Material no. (12 NC)	928024003331
		SAP net weight (piece)	0.045 kg
		ILCOS code	FD-10/41/2B-E-G13

TL-D Standard Colours


Dimensional drawing

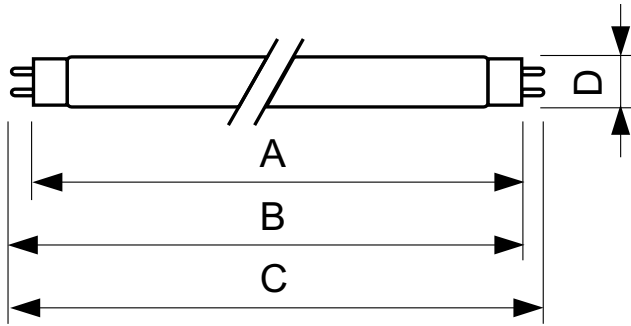

TL-D 10W/33-640

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 10W/33-640 1SL/25	28 mm	331.5 mm	338.6 mm	336.2 mm	345.7 mm


Photometric data

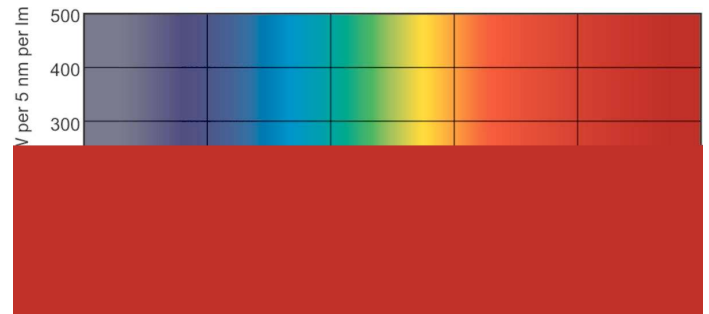


Lightcolour /33-640

Lightcolour /33-640

Lifetime

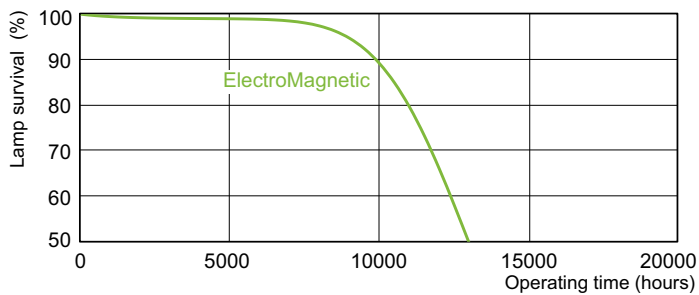


LDLE_TL-DSTD_0001-Life expectancy diagram

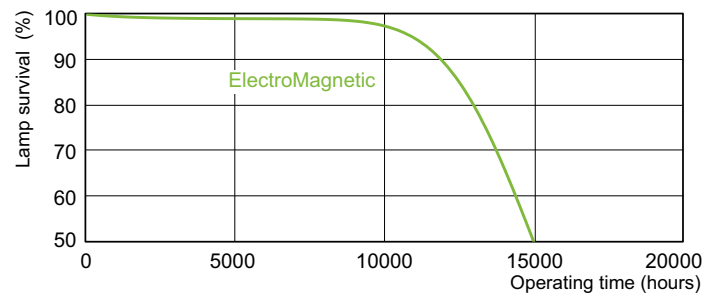

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime

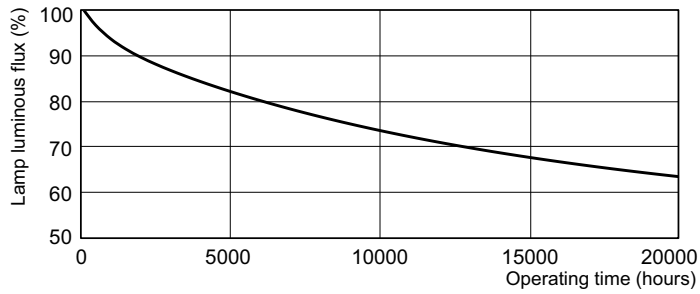

LDLM_TL-DSTD_0001-Lumen maintenance diagram

