



TL-D LIFEMAX Super 80

TL-D 30W/840 1SL/25

The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.


Product data

General information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	10000 h
Life to 50% Failures (Nom)	13000 h
Life to 50% Failures Preheat (Nom)	20000 h
Light technical	
Color Code	840 [CCT of 4000K]
Luminous Flux (Rated) (Nom)	2400 lm
Color Designation	Cool White (CW)
Lumen Maintenance 2000 h (Nom)	96 %
Lumen Maintenance 5000 h (Nom)	94 %
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	80 lm/W
Color Rendering Index (Nom)	82
Operating and electrical	
Power (Nom)	30 W
Lamp Current (Nom)	0.360 A
Voltage (Nom)	98 V

Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-Base Information	Green Cap
Bulb Shape	T8 [26 mm (T8)]
Approval and application	
Mercury (Hg) Content (Nom)	2.0 mg
Product data	
Full product code	871150028588100
Order product name	TL-D 30W/840 1SL/25
EAN/UPC - Product	8711500285881
Order code	927981284036
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927981284036
Net Weight (Piece)	0.130 kg

TL-D LIFEMAX Super 80



Dimensional drawing

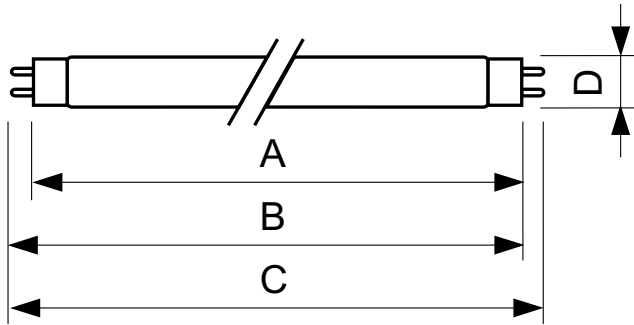

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 30W/840 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm


TL-D 30W/840 1SL/25

Lifetime

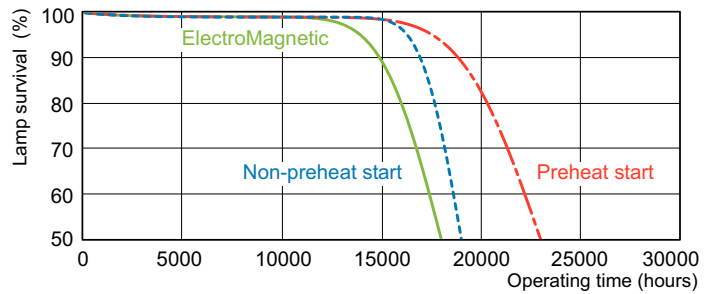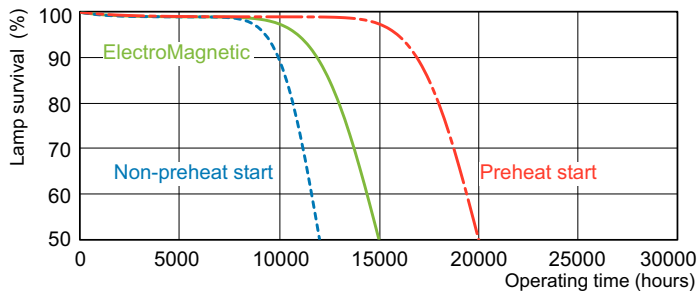

LDLE_TL-D8G_0001-Life expectancy diagram

LDLE_TL-D8G_0002-Life expectancy diagram

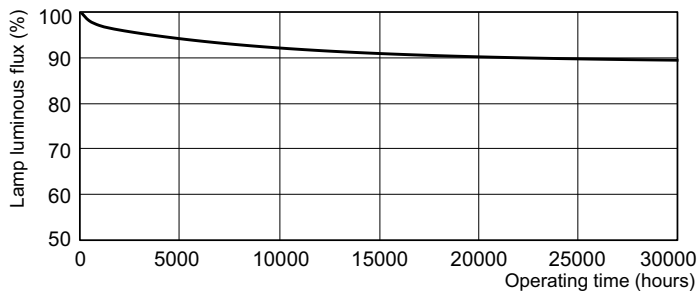

LDLM_TL-D8G_0001-Lumen maintenance diagram

TL-D LIFEMAX Super 80

