



TL-D Colored

TL-D Colored 36W Yellow 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Voltage (Nom)	
Cap base	G13 [Medium Bi-Pin Fluorescent]	103 V	
Life to 10% failures (nom.)	12000 h	Temperature	
Life to 50% failures (nom.)	15000 h	Design temperature (nom.)	25 °C
Light Technical		Controls and Dimming	
Colour Code	160	Dimmable	Yes
Lamp Luminous Flux 25°C EL (Nom)	1580 lm	Approval and Application	
Lamp Luminous Flux (Nom)	1580 lm	Energy efficiency label (EEL)	B
Colour Designation	Yellow	Mercury (Hg) content (nom.)	13.0 mg
LLMF 2000 h Rated	85 %	Energy consumption kWh/1,000 hours	44 kWh
Operating and Electrical		Product Data	
Power (Rated) (Nom)	36.0 W	Full product code	871150072751040
Lamp current (nom.)	0.440 A	Order product name	TL-D Colored 36W Yellow 1SL/25

TL-D Colored

EAN/UPC – product	8711500727510
Order code	928048501605
Local code	TLD36W16
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25

Material no. (12 NC)	928048501605
SAP net weight (piece)	135.000 g


Dimensional drawing

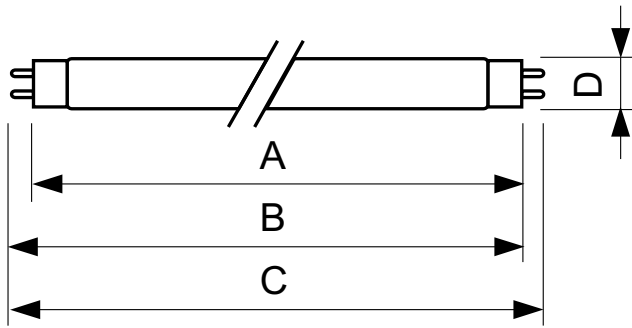


TL-D 36W/160 Yellow

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 36W Yellow 1SL/25	28.0 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

Photometric data

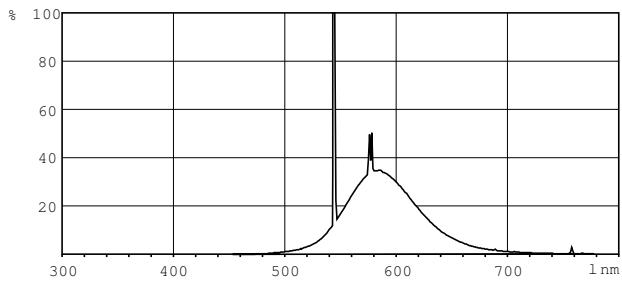

LDPB_TL-DCOL_160-Spectral power distribution B/W

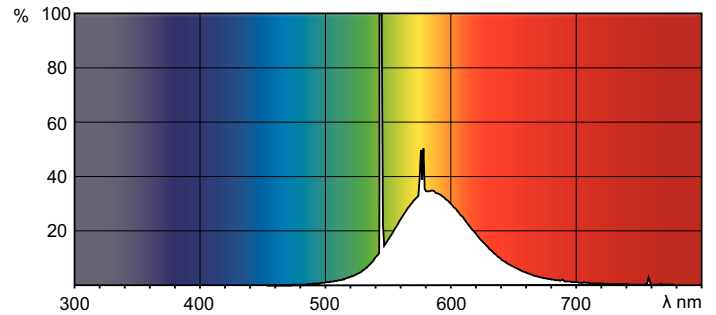

Lightcolour TL-D /160

