PHILIPS Lighting

TL-D Colored

TL-D Colored 36W Blue 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		Voltage (Nom)	103 V	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Life To 10% Failures (Nom)	12000 h	Temperature		
Life to 50% Failures (Nom)	15000 h	Design Temperature (Nom)	25 °C	
ight technical		Controls and dimming		
Color Code	180	Dimmable	Yes	
uminous Flux (Nom)	960 lm			
uminous Flux (Rated) (Nom)	960 lm	Mechanical and housing		
Color Designation	Blue (B)	Bulb Shape	T8 [26 mm (T8)]	
LMF 2000 h Rated	85 %			
		Approval and application		
Operating and electrical		Mercury (Hg) Content (Nom)	13.0 mg	
Power (Nom)	36.0 W	Energy Consumption kWh/1000 h	45 kWh	
Lamp Current (Nom)	0.440 A			


TL-D Colored

Product data			
Full product code	871150072754140		
Order product name	TL-D Colored 36W Blue 1SL/25		
EAN/UPC - Product	8711500727541		
Order code	928048501805		
Numerator - Quantity Per Pack	1		


Numerator - Packs per outer box	25
Material Nr. (12NC)	928048501805
Net Weight (Piece)	135.000 g

Dimensional drawing

Photometric data

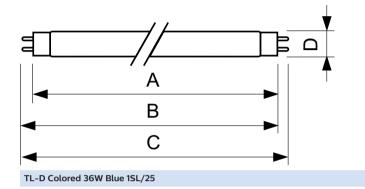

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 36W	28.0 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
Blue 1SL/25					

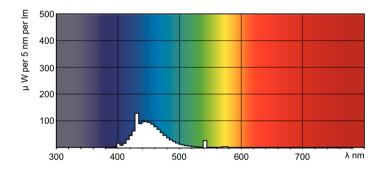

LDPB_TL-DCOL_180-Spectral power distribution B/W

LDPO_TL-DCOL_180-Spectral power distribution Colour



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2022, January 14 - data subject to change