


ALFA solid material plug with collar 5 x 25 mm screw Ø 3-4 mm grey (x 250)

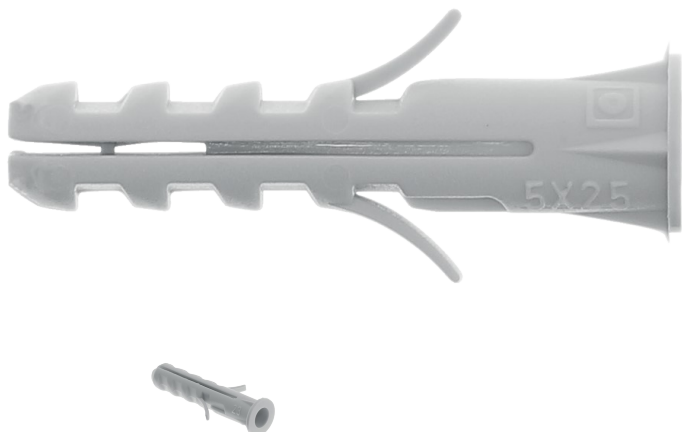

Characteristics

- Drilling Ø (mm) : 5
- Plug length (mm) : 25
- Minimum drilling depth (mm) : 35
- Thickness of the part to be fixed (mm) : 2
- Tear-out resistance * C20/C25 concrete (daN*) : 19
- Quantity per box : 250

Materials

- ☑ Concrete
- ☑ Solid brick
- ☑ Stone

Benefits

- Anti-rotation spigots for optimum attachment.
- Perfect positioning thanks to the collar.

GENERAL INFORMATION

Technical details

Polyamide 6.
Operating temperature: -20 to +60 °C.
Colour: grey RAL 7035.

Application(s)

For light attachments in solid materials (concrete, cellular concrete, solid breeze block and solid brick).

LOGISTIC INFORMATION

Packaging



Plastic bag + carton box

Height (cm) : 12
Length (cm) : 6
Depth (cm) : 9
Net weight (kg) : 0.08
Gross weight (kg) : 0.11



Outer package 1



x 30

Carton box

Height (cm) : 23
Length (cm) : 40
Depth (cm) : 30
Net weight (kg) : 3.3
Gross weight (kg) : 3.62



Outer package 2



x 1200

Pallet

Height (cm) : 130
Length (cm) : 120
Depth (cm) : 80
Net weight (kg) : 145
Gross weight (kg) : 155

