


## Sleeve anchor hexagonal nut $\varnothing$ 10 x 75 mm (x 50)

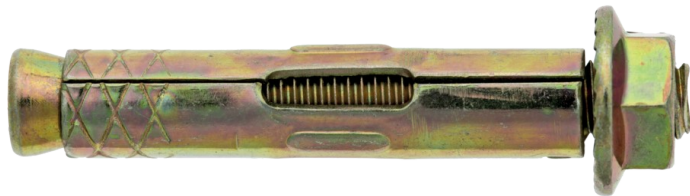

### Characteristics

$\varnothing$  (mm) : **10**  
 Length (mm) : **75**  
 Concrete C35 tensile load (daN\*) : **445**  
 Concrete C35 shear load (daN\*) : **805**  
 Quantity : **50**  
 Selling unit : **Each**

### Materials

- Concrete
- Hollow brick

### Benefits

- Full thread system can fit to various fixture thicknesses.
- Long body enables use in soft concrete thanks to good repartition of compression load.

## GENERAL INFORMATION

### Technical details

Yellow zinc plated steel.  
 Head type: hex nut.

### Application(s)

Used in concrete (soft concrete as well) and masonry applications. Ideal for fastening window frames, partitions, cabinets and more. A pre-drilled hole, equal to the anchor diameter, is required.

### Instructions

1. Drill a hole into the surface equal to the diameter and the length of the anchor.
2. Clean the hole.
3. Insert the bolt through the item and into the hole.
4. Tighten the nut with the appropriate torque.

## LOGISTIC INFORMATION

### Packaging



#### Carton box

Height (cm) : 8.7  
 Length (cm) : 12  
 Depth (cm) : 11  
 Net weight (kg) : 2.12  
 Gross weight (kg) : 2.20



### Outer package 1



x 8.00

#### Carton box

Height (cm) : 18.5  
 Length (cm) : 25.3  
 Depth (cm) : 25.3  
 Net weight (kg) : 16.96  
 Gross weight (kg) : 17.88



### Outer package 2



x 288.00

#### Pallet

Height (cm) : 114  
 Length (cm) : 114  
 Depth (cm) : 81  
 Net weight (kg) : 610.56  
 Gross weight (kg) : 663.61

