


Spring toggle round head \varnothing 1/8 x 2" yellow zinc plated steel (x 25)

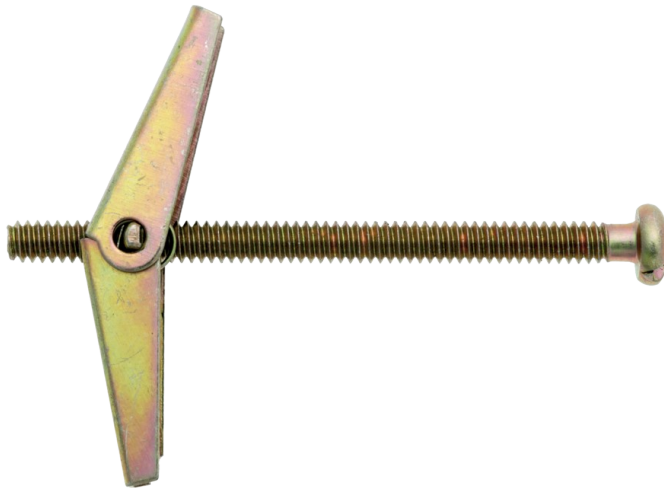

Characteristics

Screw \varnothing (pouces) : **1/8**
 Length (mm) : **2**
 Drilling \varnothing (pouces) : **7/16**
 Wall thickness (mm) : **15**
 Quantity : **25**

Materials

☑ Hollow materials

GENERAL INFORMATION

Technical details

Yellow zinc plated.
Phillips® drive.

Advice

A pre-drilled hole is required.

Application(s)

Light to medium duty anchors.
Used in hollow walls (drywalls, ceiling plasteboard and concrete block) and hollow masonry applications).

Instructions

1. Drill the recommended sized hole through the plasterboard.
2. Insert the screw through the fixture to be fastened and thread the toggle for a few turns. Fold the toggle wings and insert the anchor into the hole. The wings will spread behind the cavity wall.
3. Pull back on the fixture to hold the toggle in place against the reverse side of the cavity wall and tighten with a screwdriver, pulling the wings of the anchor firm against the cavity wall.

LOGISTIC INFORMATION

Packaging



Plastic bag with header

Height (cm) : 7.5
 Length (cm) : 21
 Depth (cm) : 10.8
 📦 Net weight (kg) : 0.13
 📦 Gross weight (kg) : 0.14



Outer package 1



Carton box

Height (cm) : 16
 Length (cm) : 35
 Depth (cm) : 26
 📦 Net weight (kg) : 5.2
 📦 Gross weight (kg) : 5.71



Outer package 2



Pallet

Height (cm) : 114
 Length (cm) : 114
 Depth (cm) : 81
 📦 Net weight (kg) : 187.2
 📦 Gross weight (kg) : 225.63



x 1440.00