


# Underground marking tape warning buried communications below white 500 m x 150 mm x 0.08 mm AU

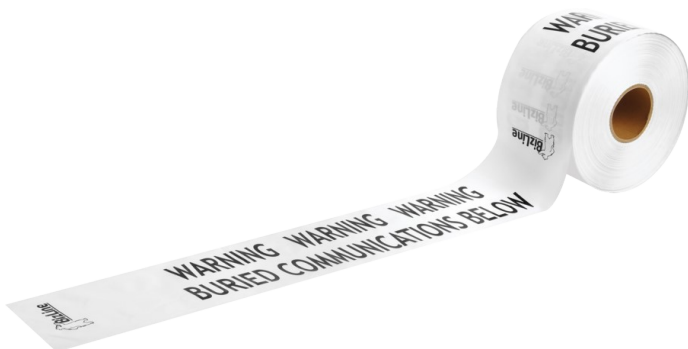

## Characteristics

**Colour :** *White*  
**Text :** *WARNING WARNING WARNING COMMUNICATIONS CABLE BELOW*  
**Length (m) :** *500*  
**Width (mm) :** *150*  
**Thickness (mm) :** *0.08*  
**Material :** *Polyethylene*

## Norms

> ISO 6383-12015 /  
ASTM D882-12

## GENERAL INFORMATION

### Description

Non detectable underground tape.

### Technical details

Core inside Ø: 76 mm.

#### Load at yield

Mounting direction: 71.2 N.

Transverse direction: 60.0 N.

#### Load at break

Mounting direction: 109.0 N.

PSI: 18.6 MPa.

Transverse direction: 104.5 N.

PSI: 17.9 MPa.

#### Elongation at break

Mounting direction: 71.2 N.

Transverse direction: 60.0 N.

#### PPT resistance

Mounting direction: 60 N.

Transverse direction: 62.3 N.

#### Tongue tear

Mounting direction: 13.2 N.

Transverse direction: 22.7 N.

### Application(s)

For protection, location and identification of underground utility installations.

## LOGISTIC INFORMATION

### Packaging



#### Color sticker

Height (cm) : 15  
 Length (cm) : 24.4  
 Depth (cm) : 24.4  
 Net weight (kg) : 5.7  
 Gross weight (kg) : 5.71



### Outer package 1



#### Carton box

Height (cm) : 17  
 Length (cm) : 50  
 Depth (cm) : 25.5  
 Net weight (kg) : 11.42  
 Gross weight (kg) : 11.92



x 2

### Outer package 2



#### Pallet

Height (cm) : 115  
 Length (cm) : 120  
 Depth (cm) : 100  
 Net weight (kg) : 572.16  
 Gross weight (kg) : 582.16



x 96