


Pipe Clamps - Medium Duty

UN15 - Saddle Clamp

Part No.	Dimensions			W x T	Working Load	Mass kg
	ØD	B	C			
UN15-021	21	75	115	40 x 5	2.46 kN	0.14
UN15-027	27	81	121	40 x 5	2.46 kN	0.20
UN15-034	34	88	128	40 x 5	2.46 kN	0.28
UN15-043	43	97	137	40 x 5	2.46 kN	0.34
UN15-048	48	102	142	40 x 5	2.46 kN	0.34
UN15-051	51	105	145	40 x 5	2.46 kN	0.34
UN15-060	60	114	154	40 x 5	2.46 kN	0.40
UN15-076	76	130	170	40 x 5	2.46 kN	0.46
UN15-089	89	143	183	40 x 5	2.46 kN	0.54
UN15-102	102	156	196	40 x 5	2.46 kN	0.58
UN15-114	114	170	210	40 x 6	3.57 kN	0.65
UN15-140	140	196	236	40 x 6	3.57 kN	0.75
UN15-152	152	208	248	50 x 6	4.44 kN	1.17
UN15-165	165	221	261	50 x 6	4.44 kN	1.25
UN15-168	168	224	264	50 x 6	4.44 kN	1.27
UN15-203	203	259	299	50 x 6	4.44 kN	1.48
UN15-219	219	275	315	50 x 6	4.44 kN	1.58

Note: Standard Finish: Hot Dipped Galvanised
Safety Factor: 2.5

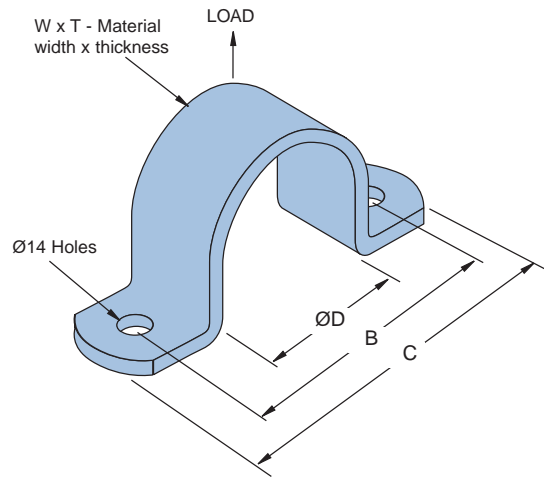

UN16 - Two-Piece Pipe Clamp

Part No.	Dimensions			W x T	Mass kg
	ØD	A	B		
UN16-060	60	154	114	40 x 5	0.72
UN16-076	76	170	130	40 x 5	0.84
UN16-089	89	183	143	40 x 5	1.02
UN16-102	102	196	156	40 x 5	1.12
UN16-114	114	210	170	40 x 6	1.17
UN16-127	127	221	181	40 x 6	1.25
UN16-140	140	234	194	40 x 6	1.31
UN16-152	152	246	206	40 x 6	1.38
UN16-165	165	259	219	40 x 6	1.46
UN16-178	178	272	232	40 x 6	1.54
UN16-190	190	284	244	40 x 6	1.64
UN16-203	203	297	257	40 x 6	1.69
UN16-219	219	313	273	40 x 6	1.78
UN16-230	230	324	284	40 x 6	1.84
UN16-240	240	334	294	40 x 6	1.92
UN16-250	250	344	304	40 x 6	2.00
UN16-273	273	367	327	40 x 6	2.18
UN16-324	324	418	378	40 x 6	2.59

Note: Standard Finish: Hot Dipped Galvanised
Working Load: 7.20 kN
Safety Factor: 2.5

