


Catalogue No: **39990702**

AUX 1NC VLB32-40 & 125-500 SSF

Power Distribution and Protection > Isolators and Transfer Switches > Load Break Switches > Socomec Load Break Switches > Socomec Accessories for Load Break Switches > Auxiliaries

**NHP**

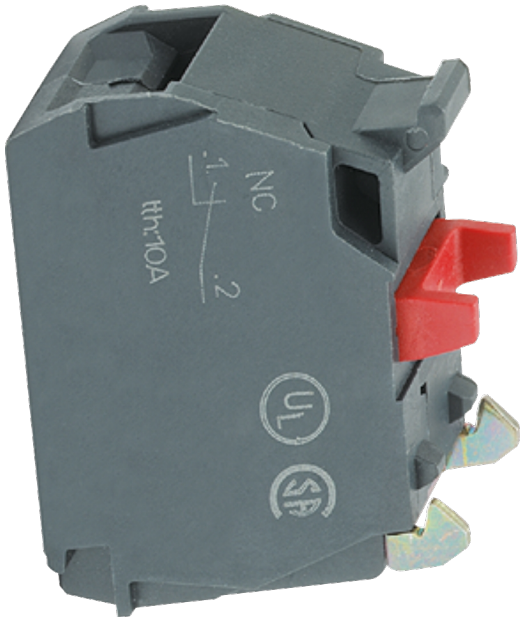

Representative Photo Only  
(actual product may vary based on configuration selections)

Auxiliary 1 N/C suits Switch Fuse VLB32 - 40 and 125 - 500, SSF 63 - 400 A

- Double break per pole offers high durability and short-circuit withstand
- Use of glass fibre reinforced polyester provides high mechanical and thermal resistance (does not include SLBM or VLBM modular series)
- Quick and easy to install thanks to good centre to centre distance and connection accessories including copper connecting links.
- Wide range of accessories available which is flexible in adapting to various applications and reduces the cost of management and storage
- All Socomec load break switches are compatible with the ergonomic IP65 S-Type Handles which features interlocking (in the ON position), padlocking, UV and chemical agent resistive material and the choice of standard blue or red / yellow colour

#### SPECIFICATIONS

Component Type Power Distribution & Protection	Auxiliary Contact
Details, Switch	VLB 32...40A
Contact Configuration	1 NCEB
Ie, Rated Operational Current, nom	5 A,nom
Ie, Rated Operational Current, nom	5 A,nom
Details, text	Front side contact. Max 4 auxiliary contacts possible.

#### REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	<a href="#">39990702_Manufacturer Product Selection Guide</a>