



Rhinocast® – Single part recessed ductile iron access cover and frame


Single part square units can be used to provide access to underground stormwater/sewer systems, electricity and communication enclosures, valves and junction boxes.



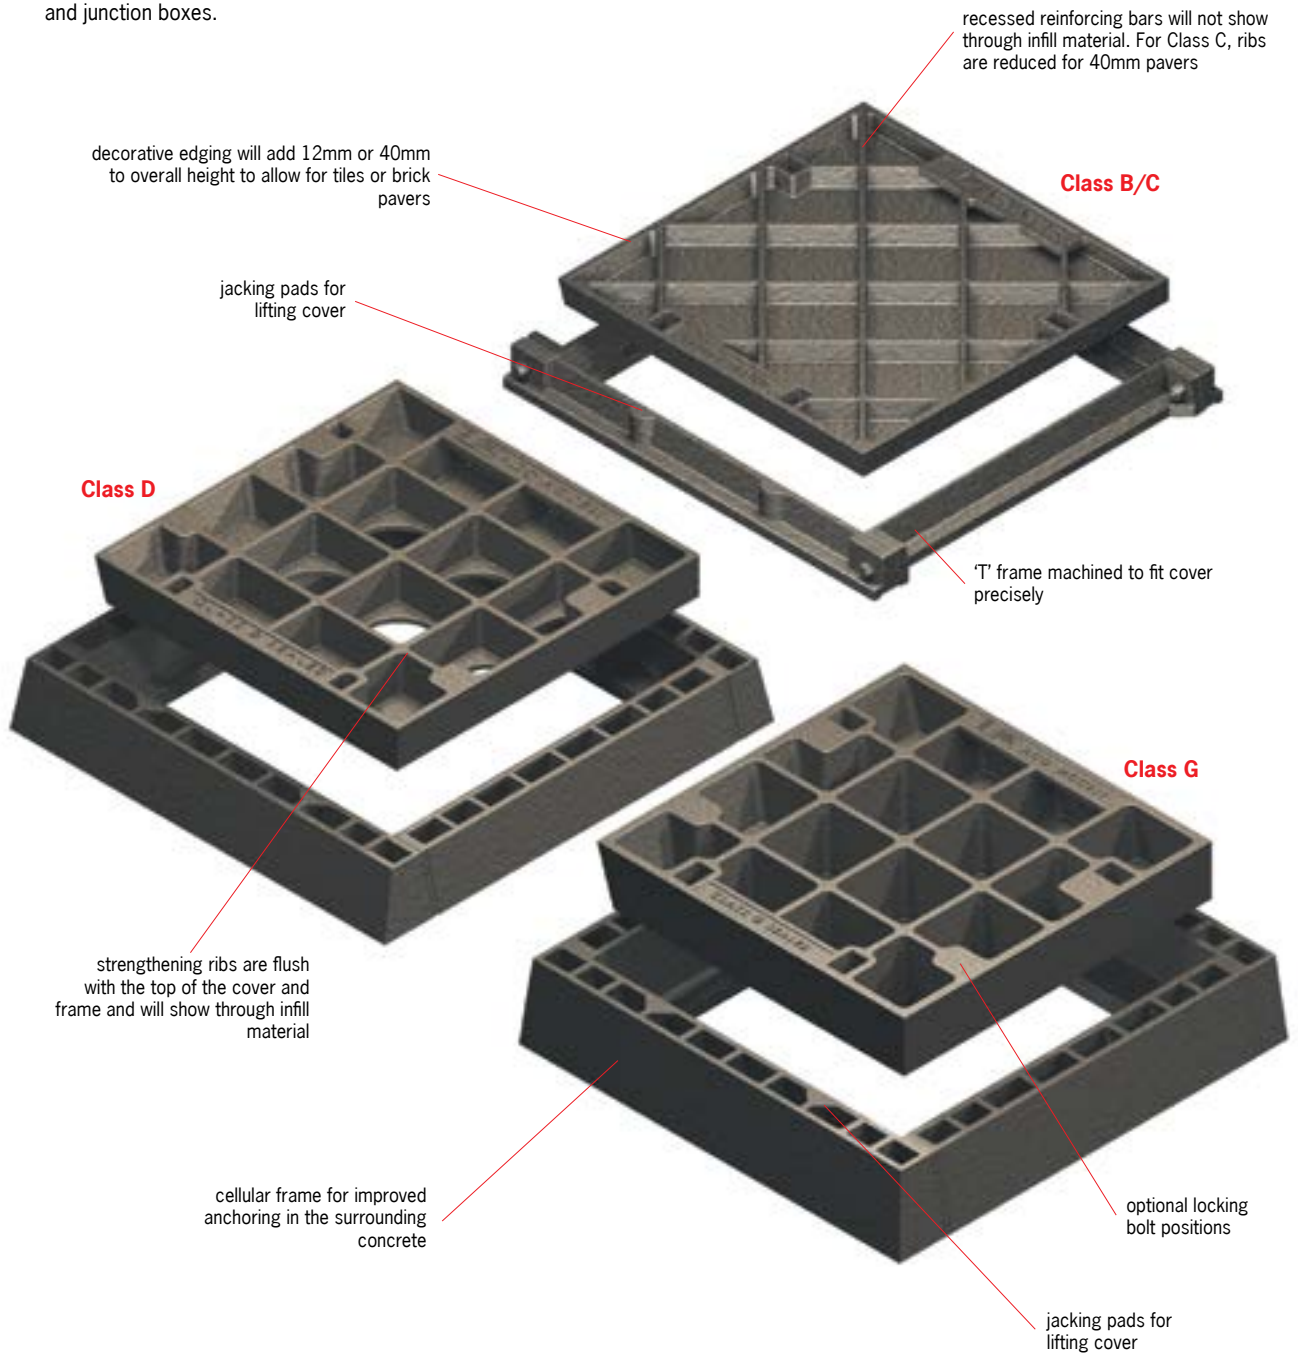

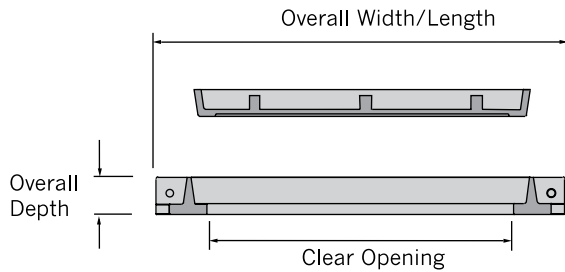

Class B - 'T' Frame

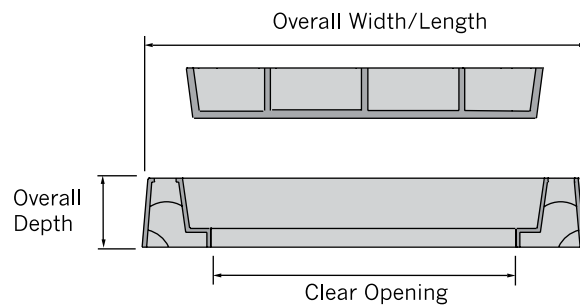

Class D/G - Cellular Frame



| Type | Part No. | Clear Opening* W x L (mm) | Overall W x L (mm) | Overall Depth (mm) | Cover Wgt (kg) | Overall Wgt (kg) | Decorative Edging* | Locking Option** |
|--|---------------|------------------------------|-----------------------|-----------------------|-------------------|---------------------|-----------------------|---------------------|
|  Class B - AS 3996 - 80kN | | | | | | | | |
| DI44B | 85014 | 450 x 450 | 600 x 560 | 55 | 28.0 | 47.0 | BE/SS - 12/40 | LD/BB |
| DI46B | 85020 | 450 x 600 | 600 x 710 | 55 | 30.0 | 56.0 | BE/SS - 12/40 | LD/BB |
| DI64B | 85037 | 600 x 450 | 750 x 560 | 55 | 28.0 | 54.0 | BE/SS - 12/40 | LD/BB |
| DI66B | 85045 | 600 x 600 | 750 x 710 | 55 | 36.0 | 63.0 | BE/SS - 12/40 | LD/BB |
| DI67B | 85125 | 600 x 750 | 750 x 860 | 55 | 43.0 | 74.0 | BE/SS - 12/40 | LD/BB |
| DI76B | 85052 | 750 x 600 | 900 x 710 | 55 | 44.0 | 74.0 | BE/SS - 12/40 | LD/BB |
| DI77B | 85061 | 750 x 750 | 900 x 860 | 55 | 60.0 | 94.0 | BE/SS - 12/40 | LD/BB |
| DI94B | 85119 | 900 x 450 | 1050 x 560 | 55 | 45.0 | 76.0 | BE/SS - 12/40 | LD/BB |
| DI96B | 85078 | 900 x 600 | 1050 x 710 | 55 | 57.0 | 89.0 | BE/SS - 12/40 | LD/BB |
| DI97B | 85086 | 900 x 750 | 1050 x 860 | 55 | 71.0 | 107.0 | BE/SS - 12/40 | LD/BB |
| DI99B | 85093 | 900 x 900 | 1050 x 1010 | 55 | 86.0 | 124.0 | BE/SS - 12/40 | LD/BB |
|  Class C - AS 3996 - 150kN - reduced ribs for 40mm deep pavers | | | | | | | | |
| DI44C | 142313 | 450 x 450 | 630 x 619 | 85 | 30.0 | 63.0 | BE/SS - 12/40 | LD/BB |
| DI66C | 142314 | 600 x 600 | 780 x 769 | 85 | 56.0 | 98.0 | BE/SS - 12/40 | LD/BB |
| DI96C | 142315 | 900 x 600 | 1080 x 769 | 85 | 75.0 | 123.0 | BE/SS - 12/40 | LD/BB |
| DI99C | 142316 | 900 x 900 | 1080 x 1069 | 85 | 102.0 | 160.0 | BE/SS - 12/40 | LD/BB |
|  Class D - AS 3996 - 210kN | | | | | | | | |
| DI44D | 89013 | 450 x 450 | 665 x 665 | 100 | 42.0 | 85.0 | BE/SS - 12/40 | LD/BB |
| DI46D | 89020 | 450 x 600 | 665 x 815 | 100 | 51.0 | 100.0 | BE/SS - 12/40 | LD/BB |
| DI64D | 89034 | 600 x 450 | 815 x 665 | 100 | 51.0 | 100.0 | BE/SS - 12/40 | LD/BB |
| DI66D | 89041 | 600 x 600 | 815 x 815 | 100 | 62.0 | 116.0 | BE/SS - 12/40 | LD/BB |
| DI67D | 89137 | 600 x 750 | 815 x 965 | 100 | 74.0 | 134.0 | BE/SS - 12/40 | LD/BB |
| DI76D | 89058 | 750 x 600 | 965 x 815 | 100 | 77.0 | 136.0 | BE/SS - 12/40 | LD/BB |
| DI77D | 89065 | 750 x 750 | 965 x 965 | 100 | 92.0 | 157.0 | BE/SS - 12/40 | LD/BB |
| DI94D | 89124 | 900 x 450 | 1115 x 665 | 100 | 72.0 | 130.0 | BE/SS - 12/40 | LD/BB |
| DI96D | 89072 | 900 x 600 | 1115 x 815 | 100 | 88.0 | 151.0 | BE/SS - 12/40 | LD/BB |
| DI97D | 89086 | 900 x 750 | 1115 x 965 | 100 | 106.0 | 175.0 | BE/SS - 12/40 | LD/BB |
| DI99D | 89093 | 900 x 900 | 1115 x 1115 | 100 | 136.0 | 209.0 | BE/SS - 12/40 | LD/BB |
|  Class G - AS 3996 - 900kN | | | | | | | | |
| DI44G | 87016 | 450 x 450 | 685 x 685 | 125 | 86.0 | 149.0 | BE/SS - 12/40 | LD/BB |
| DI64G | 87039 | 600 x 450 | 835 x 685 | 125 | 104.0 | 170.0 | BE/SS - 12/40 | LD/BB |
| DI66G | 87044 | 600 x 600 | 835 x 835 | 125 | 135.0 | 206.0 | BE/SS - 12/40 | LD/BB |
| DI77G | 87067 | 750 x 750 | 985 x 985 | 125 | 200.0 | 251.0 | BE/SS - 12/40 | LD/BB |
| DI94G | 87082 | 900 x 450 | 1135 x 685 | 125 | 145.0 | 230.0 | BE/SS - 12/40 | LD/BB |
| DI96G | 87075 | 900 x 600 | 1135 x 835 | 125 | 180.0 | 270.0 | BE/SS - 12/40 | LD/BB |

* Decorative Brass (BE) or Stainless Steel (SS) edging can be added - just specify BE or SS and height (12mm or 40mm) after part no.

** Optional locking bolts are available for security or back pressure applications - specify standard bolts (LD) or Barri bolts (BB) after part no.