



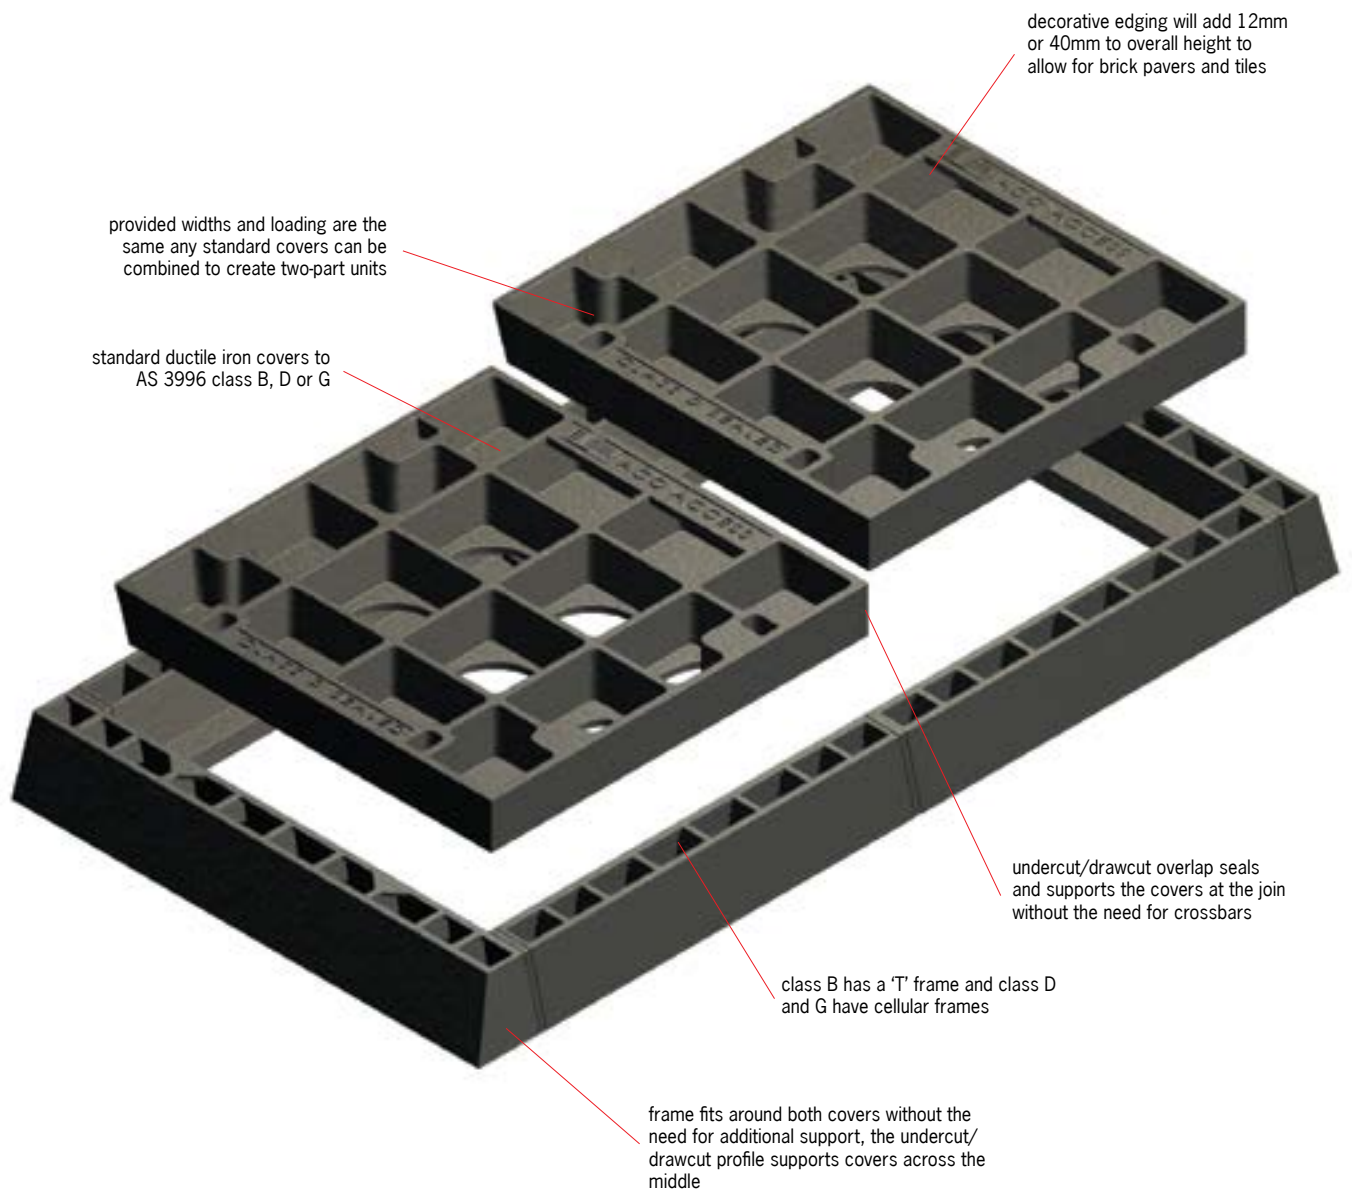


## Rhinocast® – Two-part recessed ductile iron access cover and frame

Two-part units combine two standard size covers in a single run. They are used where a single part cover does not offer a large enough clear opening or if smaller individual covers are required for easier lifting.

Common applications include grease traps/arrestors, access to underground stormwater/sewer systems, electricity and communication enclosures, valves and junction boxes.

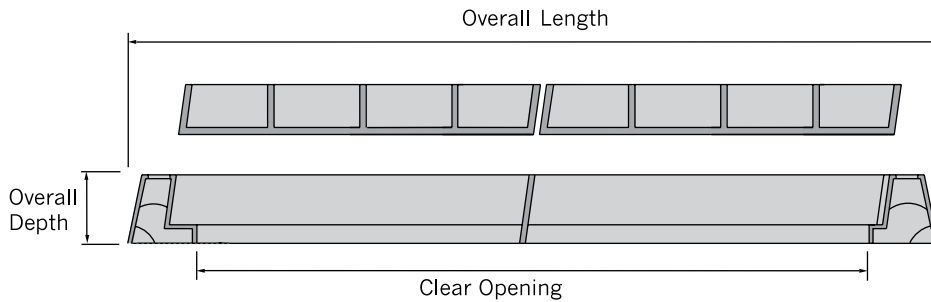



Type	Part No.	Clear Opening* W x L (mm)	Overall W x L (mm)	Overall Depth (mm)	Cover Wgt (kg)	Overall Wgt (kg)	Decorative Edging*	Locking Option**
 <b>Class B - AS 3996 - 80kN</b>								
DI249B	<b>85418</b>	450 x 945	600 x 1055	55	22.0/22.0	83.0	BE/SS - 12/40	LD/BB
DI2412B	<b>85433</b>	450 x 1245	600 x 1355	55	30.0/30.0	100.0	BE/SS - 12/40	LD/BB
DI269B	<b>85444</b>	600 x 945	750 x 1055	55	28.0/28.0	98.0	BE/SS - 12/40	LD/BB
DI2610B	<b>85459</b>	600 x 1095	750 x 1205	55	28.0/36.0	105.0	BE/SS - 12/40	LD/BB
DI2612B	<b>85465</b>	600 x 1245	750 x 1355	55	36.0/36.0	110.0	BE/SS - 12/40	LD/BB
DI2613B	<b>85426</b>	600 x 1395	750 x 1505	55	36.0/43.0	123.0	BE/SS - 12/40	LD/BB
DI2615B	<b>85555</b>	600 x 1545	750 x 1655	55	43.0/43.0	132.0	BE/SS - 12/40	LD/BB
DI2712B	<b>85477</b>	750 x 1245	900 x 1355	55	44.0/44.0	132.0	BE/SS - 12/40	LD/BB
DI2713B	<b>85482</b>	750 x 1395	900 x 1505	55	44.0/60.0	152.0	BE/SS - 12/40	LD/BB
DI2715B	<b>85499</b>	750 x 1545	900 x 1655	55	60.0/60.0	172.0	BE/SS - 12/40	LD/BB
DI299B	<b>85159</b>	900 x 945	1050 x 1055	55	45.0/45.0	142.0	BE/SS - 12/40	LD/BB
DI2910B	<b>85510</b>	900 x 1095	1050 x 1205	55	45.0/57.0	153.0	BE/SS - 12/40	LD/BB
DI2912B	<b>85503</b>	900 x 1245	1050 x 1355	55	57.0/57.0	166.0	BE/SS - 12/40	LD/BB
DI2915B	<b>85524</b>	900 x 1545	1050 x 1655	55	71.0/71.0	198.0	BE/SS - 12/40	LD/BB
DI2916B	<b>85531</b>	900 x 1695	1050 x 1805	55	71.0/86.0	213.0	BE/SS - 12/40	LD/BB
 <b>Class D - AS 3996 - 210kN</b>								
DI249D	<b>89415</b>	450 x 970	665 x 1185	100	42.0/42.0	148.0	BE/SS - 12/40	LD/BB
DI2412D	<b>89431</b>	450 x 1270	665 x 1485	100	51.0/51.0	178.0	BE/SS - 12/40	LD/BB
DI269D	<b>89448</b>	600 x 970	815 x 1185	100	51.0/51.0	173.0	BE/SS - 12/40	LD/BB
DI2611D	<b>89456</b>	600 x 1120	815 x 1335	100	51.0/62.0	189.0	BE/SS - 12/40	LD/BB
DI2612D	<b>89463</b>	600 x 1270	815 x 1485	100	62.0/62.0	205.0	BE/SS - 12/40	LD/BB
DI2614D	<b>89542</b>	600 x 1420	815 x 1635	100	62.0/74.0	223.0	BE/SS - 12/40	LD/BB
DI2615D	<b>89556</b>	600 x 1570	815 x 1785	100	74.0/74.0	241.0	BE/SS - 12/40	LD/BB
DI2712D	<b>89474</b>	750 x 1270	965 x 1485	100	77.0/77.0	237.0	BE/SS - 12/40	LD/BB
DI2714D	<b>89489</b>	750 x 1420	965 x 1635	100	77.0/92.0	261.0	BE/SS - 12/40	LD/BB
DI2715D	<b>89495</b>	750 x 1570	965 x 1785	100	92.0/92.0	282.0	BE/SS - 12/40	LD/BB
DI299D	<b>89162</b>	900 x 970	1115 x 1185	100	72.0/72.0	224.0	BE/SS - 12/40	LD/BB
DI2911D	<b>89422</b>	900 x 1120	1115 x 1335	100	72.0/88.0	245.0	BE/SS - 12/40	LD/BB
DI2912D	<b>89507</b>	900 x 1270	1115 x 1485	100	88.0/88.0	266.0	BE/SS - 12/40	LD/BB
DI2914D	<b>89512</b>	900 x 1420	1115 x 1635	100	88.0/106.0	290.0	BE/SS - 12/40	LD/BB
DI2915D	<b>89529</b>	900 x 1570	1115 x 1785	100	106.0/106.0	314.0	BE/SS - 12/40	LD/BB
DI2918D	<b>89533</b>	900 x 1870	1115 x 2085	100	136.0/136.0	382.0	BE/SS - 12/40	LD/BB
 <b>Class G - AS 3996 - 900kN</b>								
DI249G	<b>87415</b>	450 x 990	685 x 1225	125	86.0/86.0	266.0	BE/SS - 12/40	LD/BB
DI649G	<b>87448</b>	600 x 990	835 x 1225	125	104.0/104.0	305.0	BE/SS - 12/40	LD/BB
DI2611G	<b>87456</b>	600 x 1140	835 x 1375	125	104.0/135.0	341.0	BE/SS - 12/40	LD/BB
DI2612G	<b>87463</b>	600 x 1290	835 x 1525	125	135.0/135.0	377.0	BE/SS - 12/40	LD/BB
DI2715G	<b>87450</b>	750 x 1590	985 x 1825	125	200.0/200.0	553.0	BE/SS - 12/40	LD/BB
DI299G	<b>87568</b>	900 x 990	1135 x 1225	125	145.0/145.0	433.0	BE/SS - 12/40	LD/BB
DI2911G	<b>87507</b>	900 x 1140	1135 x 1385	125	145.0/180.0	446.0	BE/SS - 12/40	LD/BB
DI2912G	<b>87512</b>	900 x 1290	1135 x 1525	125	180.0/180.0	508.0	BE/SS - 12/40	LD/BB

\* Decorative Brass (BE) or Stainless Steel (SS) edging can be added - just specify BE or SS and height (12mm or 40mm) after part no.  
 \*\* Optional locking bolts are available for security or back pressure applications - specify standard bolts (LD) or Barri bolts (BB) after part no.