



2 Position Double Density Ring Run Panel >

Molex's Two Position Double Density Rear Ring Run Panel is the perfect solution for space-saving cable management. Constructed of heavy duty graphite gray powdercoated steel, the panel accommodates up to 200 Category 5 cables using our proven high density cable management rings. As the panel is recessed slightly, there is ample front clearance for using in cabinets. Of course, they can be used in open bay rack applications, as well.

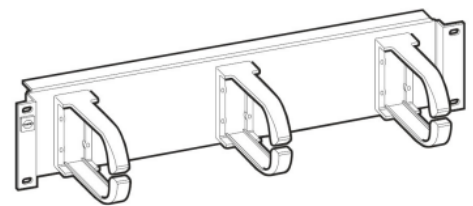

Panel Dimensions

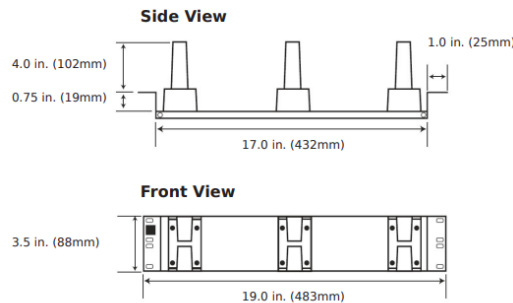

TECHNICAL INFORMATION

Mechanical Characteristics

Panel Construction

Material: Cold Rolled Steel

Thickness: .060" (1.52mm)

Finish: Graphite gray powdercoat

Ring Construction

Material: Black Lexan 943A-701

Dimensions (H-W-D): See illustration

Shipping Weight: 1.2KG

Cable Capacity: 160-200 Category 5 Cables

ORDERING INFORMATION

Order No.	SAP No.	Description
25.B058G	Consult Molex	Position Double Density Ring Run Panel

www.molex.com/products/cable-management-systems/cable-management-panels-and-rings/

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners. This information is correct at the time of publication, specifications are subject to change.

Order No. 25.B058G

NK/2024.05

©2024 Molex