


DIN RAIL, G RAIL & INSULATORS



DIN RAIL & G RAIL

Description	Dimensions (mm)	Length	Carton Qty	Part No.
DIN RAIL				
Steel Standard-Slotted	7.5 x 35.0	2m	50	TS35/S-S
Steel Heavy Duty-Slotted	15.0 x 35.0	2m	30	TS35/HD-S
Steel Standard-Unslotted	7.5 x 35.0	2m	50	TS35/S
Steel Heavy Duty-Unslotted	15.0 x 35.0	2m	30	TS35C/HD
Alum. Standard-Slotted	7.5 x 35.0	2m	50	TS35/S-S-ALU
Alum. Standard-Unslotted	7.5 x 35.0	2m	50	TS35/S-ALU
G RAIL				
Steel - Slotted	32	2m	30	TS32GRAIL-S
Steel - Unslotted	32	2m	30	TS32GRAIL

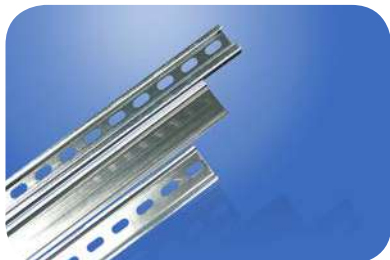

ACCESSORIES

Description	Carton Qty	Part No.
Angle support 45 degrees (M6) 6mm thread	25	TS-S
Top Hat Brackets (M6)	25	CA703
G Rail Mounting Bracket (Nylon)	50	P-KLIP M5-M3
G Rail Mounting Bracket (Nylon)	50	P-KLIP M6-M4



STAND-OFF INSULATORS

Height mm	Diameter mm	Threaded Insert	Test Voltage	Carton Qty	Part No.
25	30.0	M6	0.66kV	300	SD125
35	32.0	M8	1kV	100	SD135
54	44.5	M8	0.66kV	30	14NB1
51	63.5	M10	0.66kV	24	14NB5
76	50.0	M10	1.5kV	50	SD176