

MOTORISED SIRENS

Super Celere



- Sound output up to 117dB @ 1m
- Horizontal mounting
- Wide choice of voltage
- Double insulated


SPECIFICATIONS

MODEL	VOLTAGE	CURRENT	FREQUENCY	DECIBELS @ 1M
SCLBA12C	12Vdc	9.5A	820Hz	114dB
SCLBA24C	24Vdc	5.0A	820Hz	114dB
SCL12CA	12Vac/dc	17.4A	900Hz	114dB
SCL24CA	24Vac/dc	8.8A	900Hz	115dB
SCL110CA	110Vac/dc	1.9A	1000Hz	116dB
SCL240CA	240Vac/dc	1.1A	1050Hz	117dB

Protection:	IP43
Rating:	Continuous 12 and 24Vdc 1 min on, 10 min off (Ac/dc versions)
Voltage Tolerance:	±10%
Temp Rating (°C):	-30 to +50
Cable Entry:	M12
Construction:	Polycarbonate and ABS
Weight:	1.6Kg (12 and 24Vdc) 1.5Kg (all ac/dc versions)

ORDER CODE

SIR4501210	12Vdc
SIR4502410	24Vdc
SIR4501230	12Vac/dc
SIR4502430	24Vac/dc
SIR4511030	110Vac/dc
SIR4524030	240Vac/dc

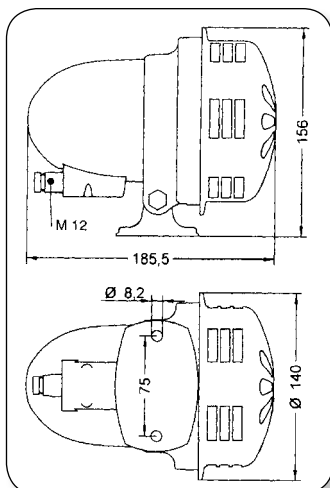

Dimensions in mm

