


ELECTRA CABLES

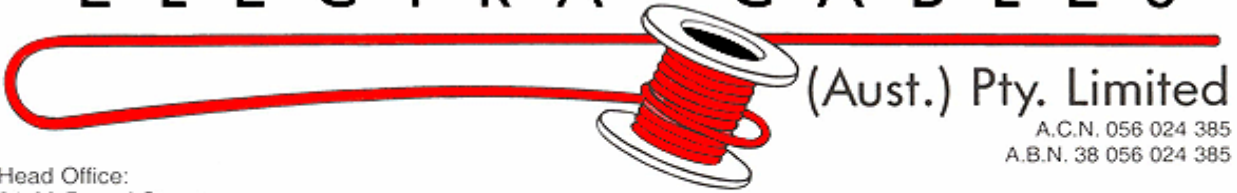

(Aust.) Pty. Limited

A.C.N. 056 024 385
A.B.N. 38 056 024 385

Head Office:
21-23 Pavese Street
Guildford, N.S.W. 2161
P.O. Box 2084
Smithfield, N.S.W. 2164
Phone: (02) 9632 2266
Fax: (02) 9632 8822

Victoria Branch:
22-24 Kilkenny Court
Dandenong South, Vic. 3175
Phone: (03) 9769 2811
Fax: (03) 9769 2425

Queensland Branch:
Unit 2-3, 52 Fulcrum Street
Richlands, Qld, 4077
Phone: (07) 3375 6277
Fax: (07) 3375 6299

Orange Circular Control Cable (0.6/1kV)

0.6/1kV V-90 insulated, PVC sheathed.

Application: For mains, sub mains and sub circuits unenclosed, enclosed in conduit buried direct or underground ducts for buildings and industrial plants where not subject to mechanical damage. Suitable for glanding.

Conductor: Plain annealed copper (AS/NZS 1125)

Insulation: PVC V90

Sheath: PVC V90

Normal Operating Temperature: 90°C


Cable Description: White numbered cores, with orange sheath

Standard: AS/NZS 5000.1

1.5mm² (7/0.5mm)

Electra Cables Part No.	Stranding No./mm	Insulation Thickness mm	Sheath Thickness mm	Nom. O/D mm	Approx. Mass Kg/Km
SRCC2015E	2x7/0.5+7/0.5E	0.8	1.8	10.3	106
SRCC3015E	3x7/0.5+7/0.5E	0.8	1.8	11.5	130
SRCC4015E	4x7/0.5+7/0.5E	0.8	1.8	12.3	156
SRC5015E	5x7/0.5+7/0.5E	0.8	1.8	12.7	220
SRC6015E	6x7/0.5+7/0.5E	0.8	1.8	13.2	240
SRC8015E	8x7/0.5+7/0.5E	0.8	1.8	15.2	300
SRC10015E	10x7/0.5+7/0.5E	0.8	1.8	16.5	350
SRC12015E	12x7/0.5+7/0.5E	0.8	1.8	17.4	400
SRC16015E	16x7/0.5+7/0.5E	0.8	1.8	19.2	510
SRC20015E	20x7/0.5+7/0.5E	0.8	1.8	20.2	590
SRC25015E	25x7/0.5+7/0.5E	0.8	1.8	22.9	710
SRC30015E	30x7/0.5+7/0.5E	0.8	1.8	24.5	830
SRC40015E*	40x7/0.5+7/0.5E	0.8	1.8	28.5	1070
SRC50015E*	50x7/0.5+7/0.5E	0.8	2.0	30.2	1290

ELECTRA CABLES

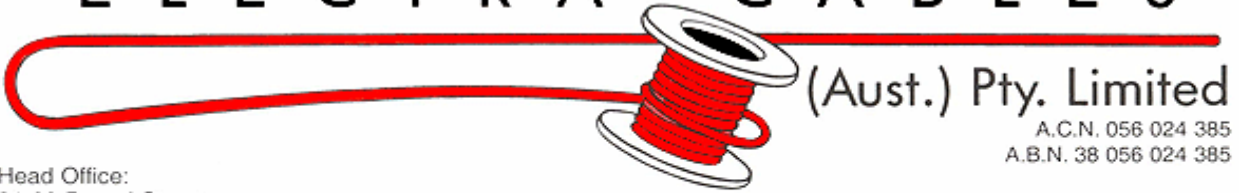

(Aust.) Pty. Limited

A.C.N. 056 024 385
A.B.N. 38 056 024 385

Head Office:
21-23 Pavese Street
Guildford, N.S.W. 2161
P.O. Box 2084
Smithfield, N.S.W. 2164
Phone: (02) 9632 2266
Fax: (02) 9632 8822

Victoria Branch:
22-24 Kilkenny Court
Dandenong South, Vic. 3175
Phone: (03) 9769 2811
Fax: (03) 9769 2425

Queensland Branch:
Unit 2-3, 52 Fulcrum Street
Richlands, Qld, 4077
Phone: (07) 3375 6277
Fax: (07) 3375 6299

2.5mm² (7/0.67mm)

Electra Cables Part No.	Stranding No./mm	Insulation Thickness mm	Sheath Thickness mm	Nom. O/D mm	Approx. Mass Kg/Km
SRCC2025E	2x7/0.67+7/0.67E	0.8	1.8	11.4	202
SRCC3025E	3x7/0.67+7/0.67E	0.8	1.8	12.6	243
SRCC4025E	4x7/0.67+7/0.67E	0.8	1.8	13.8	286
SRC5025E	5x7/0.67+7/0.67E	0.8	1.8	14.6	310
SRC6025E	6x7/0.67+7/0.67E	0.8	1.8	14.6	340
SRC8025E	8x7/0.67+7/0.67E	0.8	1.8	17.3	430
SRC10025E	10x7/0.67+7/0.67E	0.8	1.8	18.1	500
SRC12025E	12x7/0.67+7/0.67E	0.8	1.8	19.0	570
SRC16025E	16x7/0.67+7/0.67E	0.8	1.8	21.6	730
SRC20025E	20x7/0.67+7/0.67E	0.8	1.8	22.8	850
SRC25025E*	25x7/0.67+7/0.67E	0.8	1.8	25.2	1040
SRC30025E*	30x7/0.67+7/0.67E	0.8	1.8	27.6	1200
SRC40025E*	40x7/0.67+7/0.67E	0.8	2.0	31.5	1600
SRC50025E*	50x7/0.67+7/0.67E	0.8	2.0	33.7	1940

- * Those items are subject to minimum order Quantity. Please contact our sales team for details