

Catalogue No: **14333111**

HANDLE EXTERNAL MOUNT S3 TYPE IP65 BLACK

Power Distribution and Protection > Isolators and Transfer Switches > Load Break Switches > Socomec Load Break Switches > Socomec Accessories for Load Break Switches > External Mount Handle - S Type Series



Representative Photo Only
(actual product may vary based on configuration selections)

HANDLE P S3 I-O

- Double break per pole offers high durability and short-circuit withstand
- Use of glass fibre reinforced polyester provides high mechanical and thermal resistance (does not include SLBM or VLBM modular series)
- Quick and easy to install thanks to good centre to centre distance and connection accessories including copper connecting links.
- Wide range of accessories available which is flexible in adapting to various applications and reduces the cost of management and storage
- All Socomec load break switches are compatible with the ergonomic IP65 S-Type Handles which features interlocking (in the ON position), padlocking, UV and chemical agent resistive material and the choice of standard blue or red / yellow colour

SPECIFICATIONS

Component Type Power Distribution & Protection	Handle
Number of Poles	4
Ie, Rated Operational Current, AC-21a, 415V	630 A@415V
Details, Switch	SSF BS/DN 630...800A
Handle Type	S4 T Handle type
Colour, Bezel	Black
Colour, Handle	Blue & Black colour
Details, text	"OFF" padlockable, "ON" locking field convertible. Front operation. Pistol - S3 type handle.
IP Rating	IP65
Padlockable	Yes


REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	14333111_Manufacturer Product Selection Guide


Catalogue No: **14333111**

HANDLE EXTERNAL MOUNT S3 TYPE IP65 BLACK

Power Distribution and Protection > Isolators and Transfer Switches > Load Break Switches > Socomec Load Break Switches > Socomec Accessories for Load Break Switches > External Mount Handle - S Type Series




S3 handle



Front operation

Conventional fixing (from rear): **D** = 31 to 37 mm
Fast fixing (external, door closed): **D** = 37 mm

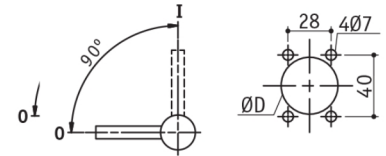

Side operation

Conventional fixing (from rear): **D** = 31 to 37 mm
Fast fixing (external, door closed): **D** = 37 mm

Dimension Diagram