




AUX 1NO+1NC SLB 125A - 3200A 1ST

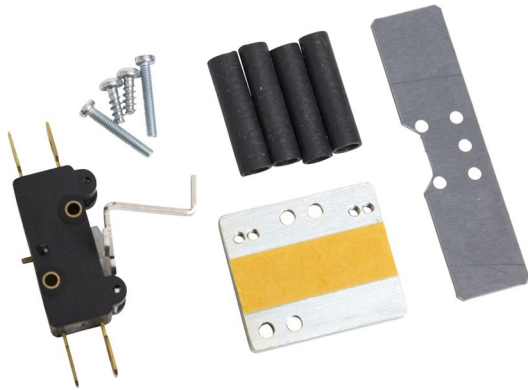

- Double break per pole offers high durability and short-circuit withstand
- Use of glass fibre reinforced polyester provides high mechanical and thermal resistance (does not include SLBM or VLBM modular series)
- Quick and easy to install thanks to good centre to centre distance and connection accessories including copper connecting links.
- Wide range of accessories available which is flexible in adapting to various applications and reduces the cost of management and storage
- All Socomec load break switches are compatible with the ergonomic IP65 S-Type Handles which features interlocking (in the ON position), padlocking, UV and chemical agent resistive material and the choice of standard blue or red / yellow colour

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Component Type Power Distribution & Protection	Auxiliary Contact
Number of Poles	3
Details, Switch	SLB 125...3200A
Contact Configuration	1 NO + 1 NC EB 1st Contact
Ie, Rated Operational Current, nom	16 A,nom
Ie, Rated Operational Current, nom	16 A,nom
Details, text	1st position contact

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	26990141_Manufacturer Product Selection Guide