




**SHAFT 320MM 15X15MM T HDL**

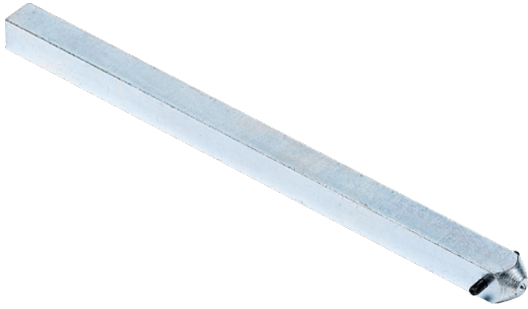

- Double break per pole offers high durability and short-circuit withstand
- Use of glass fibre reinforced polyester provides high mechanical and thermal resistance (does not include SLBM or VLBM modular series)
- Quick and easy to install thanks to good centre to centre distance and connection accessories including copper connecting links.
- Wide range of accessories available which is flexible in adapting to various applications and reduces the cost of management and storage
- All Socomec load break switches are compatible with the ergonomic IP65 S-Type Handles which features interlocking (in the ON position), padlocking, UV and chemical agent resistive material and the choice of standard blue or red / yellow colour

Representative Photo Only  
(actual product may vary based on configuration selections)

**SPECIFICATIONS**

Component Type Power Distribution & Protection	Shaft
Details, Switch	SLB 125...3200A
Distance, Backplate to Door, Min	653 mm
Distance, Backplate to Door, Max	923 mm
Width, Shaft	15 mm
Length, Shaft	320 mm
Shape, Shaft Cross Section	Square shaft

**REFERENCES**

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	<a href="#">27993018_Manufacturer Product Selection Guide</a>