Catalogue No: CA8-5-10-240VAC

CONTACTOR MINI 2.2kW 3P 240V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA8 Miniature Contactors 2.2 to 5.5kW > 3 Pole Contactors with AC Coil





Mini Contactor 3 pole 5A 2.2kW 1N/O Auxiliary 240V AC Coil

- Features low-profile design and 45mm width, permitting the use of enclosures with shallow mounting depths
- Accessories require no additional panel space
- Available in AC or DC control coil versions to suit your application requirements
- DIN rail mountable for easy installation

Representative Photo Only

(actual product may vary based on configuration selections)

SPECIFICATIONS	
Product Series	CA8-05
Component Type Motor Control and Drives	Standard Contactor
le, Rated Operational Current, AC-1, 415V, 40°C	20 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	2.2 kW @415V, 60°C
le, Rated Operational Current, AC-3, 415V, 60°C	4.9 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	2.2 kW @690V, 60°C
le, Rated Operational Current, AC-3, 690V, 60°C	2.8 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Contact Configuration, Auxiliary	1 NO auxiliary
Coil Туре	Conventional type
Coil Voltage	240 V AC V
IP Rating	IP20
REFERENCES	
REFERENCES	
IECEx Certificate -	
Supplier Declaration of	
Installation Guide: -	
User Manual: -	
Manufacturer Datasheet: -	
Manufacturer Catalogue & Product Selection:	




Catalogue No: CA8-5-10-240VAC

CONTACTOR MINI 2.2kW 3P 240V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA8 Miniature Contactors 2.2 to 5.5kW > 3 Pole Contactors with AC Coil



Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes

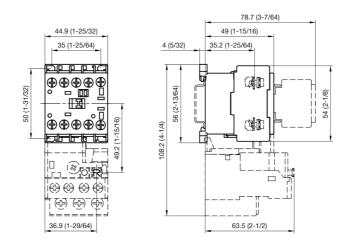

REVERSING CONTACTORS & ACCESSORIES

Contactor with		
reversing with mechanical interlock		
with aux. contact block		
on contactor	81.7	
at side of contactor	66.9	
with nameplate		
	on contactor	

Dimension Diagram

