


Catalogue No: CA8-9-01-415VAC

CONTACTOR MINI 4kW 3P 415V AC COIL 1NC AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA8 Miniature Contactors 2.2 to 5.5kW > 3 Pole Contactors with AC Coil

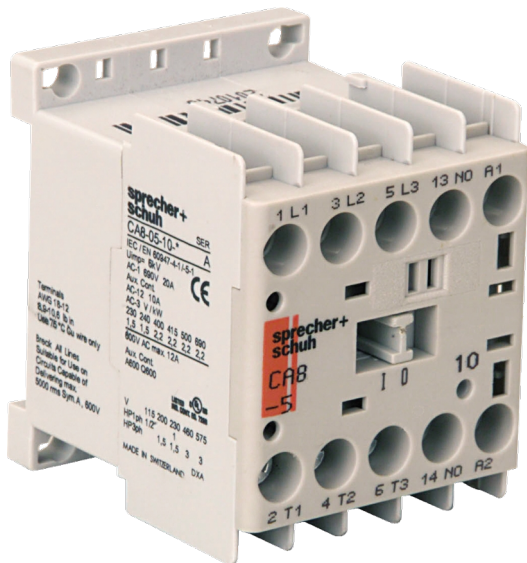

Mini Contactor 3 pole 9A 4kW 1N/C Auxiliary 415V AC Coil

- Features low-profile design and 45mm width, permitting the use of enclosures with shallow mounting depths
- Accessories require no additional panel space
- Available in AC or DC control coil versions to suit your application requirements
- DIN rail mountable for easy installation

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

| | |
|---|--------------------------|
| Product Series | CA8-09 |
| Component Type | Motor Control and Drives |
| Standard Contactor | |
| Ie, Rated Operational Current, AC-1, 415V, 40°C | 20 A@415V,40°C |
| kW Rating, AC-3, 415V, 60°C | 4 kW @415V, 60°C |
| Ie, Rated Operational Current, AC-3, 415V, 60°C | 8.5 A@415V,60°C |
| kW Rating, AC-3, 690V, 60°C | 4 kW @690V, 60°C |
| Ie, Rated Operational Current, AC-3, 690V, 60°C | 4.9 A@690V,60°C |
| Number of Poles | 3 |
| Contact Configuration, Main Poles | 3 NO main poles |
| Coil Type | Conventional type |
| Integrated Aux | 1 N/C |
| Coil Voltage | 415 V AC V |
| IP Rating | IP20 |

REFERENCES

| | |
|---|---|
| IECEX Certificate | - |
| Supplier Declaration of Conformity: | - |
| Installation Guide: | - |
| User Manual: | - |
| Manufacturer Datasheet: | - |
| Manufacturer Catalogue & Product Selection: | - |


Catalogue No: CA8-9-01-415VAC

CONTACTOR MINI 4kW 3P 415V AC COIL 1NC AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA8 Miniature Contactors 2.2 to 5.5kW > 3 Pole Contactors with AC Coil



Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

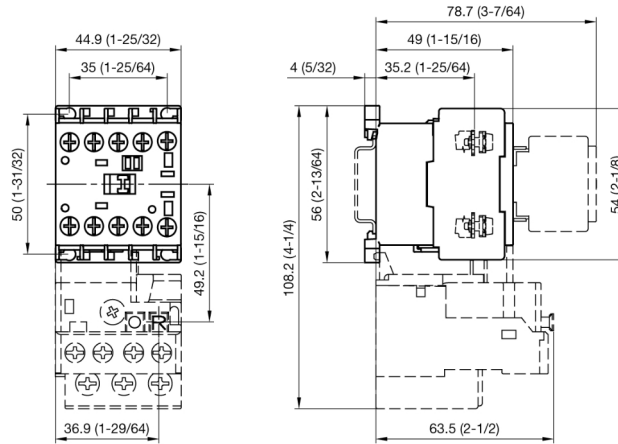

REVERSING CONTACTORS & ACCESSORIES

| Contactor with... | Dim. [mm] | |
|-------------------------------------|----------------------|------|
| reversing with mechanical interlock | 89.8 | |
| with aux. contact block | 78.7 | |
| with timer | on contactor | 81.7 |
| | at side of contactor | 66.9 |
| with protection element | | |
| with nameplate | 51 | |

Dimension Diagram