


GS1AF33

TeSys GS - blown fuse signalling contact - 1st C/O -
3 poles - 160 A

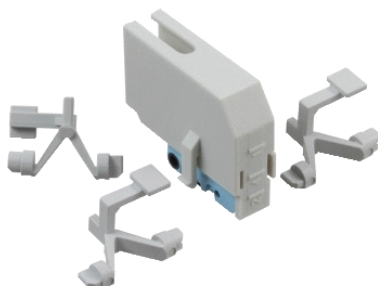

Main

Range of product	TeSys
Device short name	GS1AF
Product or component type	Auxiliary contact
Contact application	Blown fuse signalling
Contacts type and composition	1 C/O
Contact operation	Instantaneous
[Ith] conventional free air thermal current	16 A at 40 °C
[Ie] rated operational current	12 A at 24 V DC-13 2 A at 48 V DC-13 3 A at 400 V AC-15 4 A at 230 V AC-15 0.4 A at 220 V DC-13 0.6 A at 110 V DC-13

Complementary

Range compatibility	TeSys ,TeSys GS ,fuse-switch disconnecter
Mechanical durability	30000 cycles
Electrical durability	30000 cycles on AC-15
Product compatibility	GS
Poles description	3P
[In] rated current	160 A
Fuse type	DIN NFC
Fuse size	0
Product weight	0.036 kg

Environment

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0742 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.