


# Green/Yellow 2/1 thin wall heat-shrink tubing without glue 5/2.5 mm 4 ft

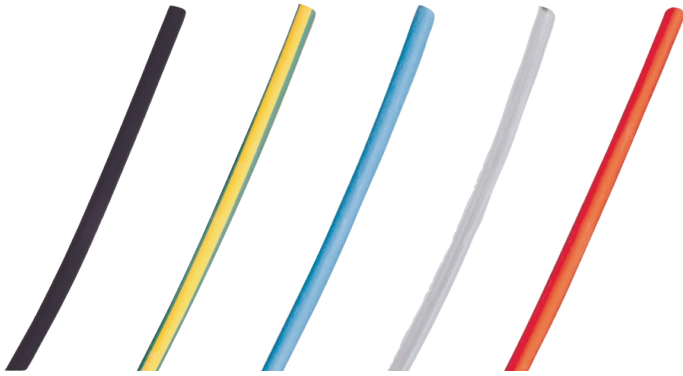

## Characteristics

Colour : **Yellow/green**  
 Wall Ø before shrinking (mm) : **5**  
 Wall Ø after shrinking (mm) : **2.5**

## GENERAL INFORMATION

### Description

Thin wall 2/1 heat-shrink tubing without adhesive.

### Technical details

Thin wall, 2/1 shrinkage in length 1.2 meter.  
 Heat-shrink tubing in flexible flame retardant polyolefin (except clear).  
 Working temperature: -45 °C to +125 °C (clear is -45 °C to +105 °C).  
 Shrink temperature: 120 °C (clear is 105 °C).  
 Dielectric strength (IEC 243): 15 kV/mm.  
 Tensile strength: 10.4 Mpa.  
 Rate voltage: 600 V.  
 Self-extinguishing in accordance with UL224 (except clear).

### Application(s)

For general and specific applications in the following areas: electrical insulation, marking and identification, protection (mechanical against corrosion), management and maintenance of wires.

## ADDITIONAL INFORMATION

Color and diameter next pages.

## LOGISTIC INFORMATION

### Packaging



#### No packaging

Height (cm) : 0.5  
 Length (cm) : 120  
 Depth (cm) : 0.5  
 Net weight (kg) : 0.01  
 Gross weight (kg) : 0.01



### Outer package 1



x 10

#### Bag

Height (cm) : 3.8  
 Length (cm) : 120  
 Depth (cm) : 0.8  
 Net weight (kg) : 0.05  
 Gross weight (kg) : 0.07



### Outer package 2



x 300

#### Carton box

Height (cm) : 8  
 Length (cm) : 130  
 Depth (cm) : 20  
 Net weight (kg) : 3  
 Gross weight (kg) : 3.6



### Outer package 3



x 16800

#### Pallet

Height (cm) : 115  
 Length (cm) : 130  
 Depth (cm) : 80  
 Net weight (kg) : 168  
 Gross weight (kg) : 201.6

