


Catalogue No: **557320**

FLAT TINNED COPPER BRAID 290A 70mm² PRICE PER METRE

Power Distribution and Protection > Busbar, Chassis and Power Connections > Flexible Busbar and Braids > Eriflex
Flexible Busbar and Braid > Flat Tinned Copper Braid

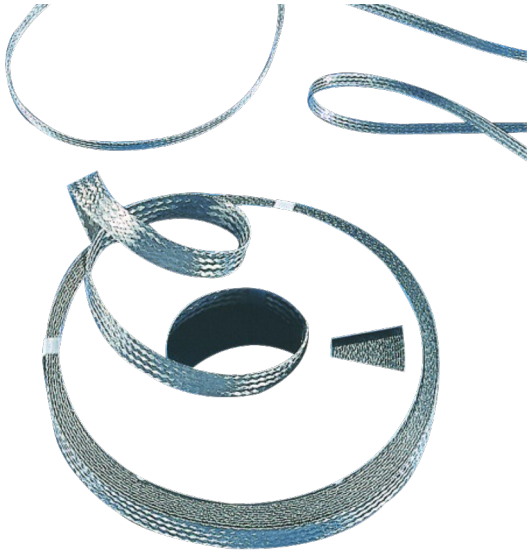

Flat tinned copper braid suits 70mm²

- Many applications where low-voltage cable or busbar is used, including busbar systems, switchboards, motor control centres and control panels.
- Reduces time for assemble and costs.
- Flexible Earthing connections for all environments
- The complete range of flexible conductors and insulators for multiple applications

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Component Type, Flexible Busbar and Braid Type	Braid
In, Rated Current	290 A
Material, Wire / Conductor	Copper
Material, cable jacket	Metal material
Wire / Conductor Size	70 mm ²
Package Quantity	1 qty
Number of Strands	3968
Material Thickness, Conductor	3.5 mm
Width	30 mm
Weight	0.7 kg
Certifications	C-UR-US

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-