

Catalogue No: **CAS7-30E-14C-24VDC**

SAFETY CONTACTOR 15kW 3P 24V DC COIL 1NO 4NC AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CAS7 Safety Contactors 4 to 45kW > 3 Pole Safety Contactors with DC Coil



Safety Contactor 3 pole 30A 15KW 1N/O 4N/C 24V DC electronic Coil



- Permanently installed cover prevents manual operation
- Red contact housing for easy identification

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	CAS7
Component Type Motor Control and Drives	Safety Contactor
Contactor Group	Contactors > 7.5 kW to 22 kW
I _e , Rated Operational Current, AC-1, 415V, 40°C	65 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	15 kW @415V, 60°C
I _e , Rated Operational Current, AC-3, 415V, 60°C	30 A@415V,60°C
Contact Configuration, Main Poles	3 NO main poles
Contact Configuration, Auxiliary	1 NO + 4 NC auxiliary
Main Poles	3 N/O
Coil Type	Electronic type
Coil Voltage, DC, Nom	24 V DC
Integrated Aux	1 N/O + 4 N/C
Product Notes	Cross Stamped Auxiliary Contacts
IP Rating	IP20

REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-


Catalogue No: CAS7-30E-14C-24VDC

SAFETY CONTACTOR 15kW 3P 24V DC COIL 1NO 4NC AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CAS7 Safety Contactors 4 to 45kW > 3 Pole Safety Contactors with DC Coil



Dimensions are in millimeters. Dimensions are not intended for manufacturing purposes.

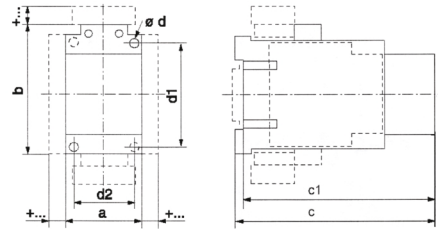


Cat No.	a	b	c	c1	ød	d1	d2
CAS 7-9D...CAS 7-16D	45	81	145.5	140.5	2 pcs 4.5	60	35
CAS 7-23D	45	81	162.5	158	2 pcs 4.5	60	35
CAS 7-30D...CAS 7-37D	45	81	180.5	175.5	2 pcs 4.5	60	35
CAS 7-43D	54	81	183.5	179	2 pcs 4.5	60	45
CAS 7-60D...CAS 7-85D	72	122	156	150.5	4 pcs 5.4	100	55

Accessories

Contactor with ...		mm
Auxiliary contact block, side-mounted	1 or 2 pole	a + 9
Solid-state timing module (100-ETA)	on coil connection side	b + 24
Solid-state timing module (100-ETB / 100-ETY)	on coil connection side	-
Mechanical interlock	side-mounted	a + 9
Interface	on coil connection side	-
Suppressor module	on coil connection side	b + 3
Marking with:	sheets of labels	+ 0
	marking sheets with cover	+ 0
	label holder for V4/V5	+ 5.5
	label holder for V7	+ 5.5

Dimension Diagram

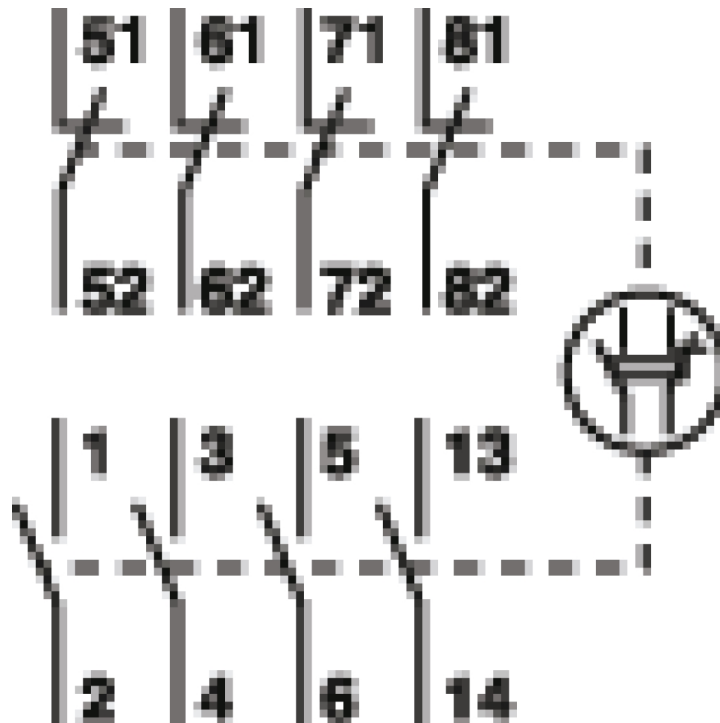

Connection / Wiring Diagram