

Catalogue No: **DSRCBSAX**

DIN-T AUXILIARY WITH H & SILVER CONTACT

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > DIN-T Accessories > DIN-T Auxiliaries > DIN-T Auxiliary contact to suit DSRCBS



Representative Photo Only
(actual product may vary based on configuration selections)

Auxiliary Contact Silver Contacts- suits DSRCBS

- Din-T auxiliary contacts indicate main contact position of the associated main device. 'H' = Auxiliary Switch
- Din-T alarm contacts indicate if main device has tripped. 'S' = Alarm Switch
- These auxiliaries are field fitable and feature a changeover contact

SPECIFICATIONS


Product Series	DIN-T
Component Type Power Distribution & Protection	Auxiliary Contact
Wire / Conductor Size, Flex Cable, Max	2.5 mm ² max
Wire / Conductor Size, Rigid Cable, Max	2.5 mm ² max
Electrical Service Life at Un, In	10000 cycles
Weight	0.07 kg
Standards Compliance	AS/NZS 61009

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-



Catalogue No: **DSRCBSAX**
DIN-T AUXILIARY WITH H & SILVER CONTACT

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > DIN-T Accessories > DIN-T Auxiliaries > DIN-T Auxiliary contact to suit DSRCBS

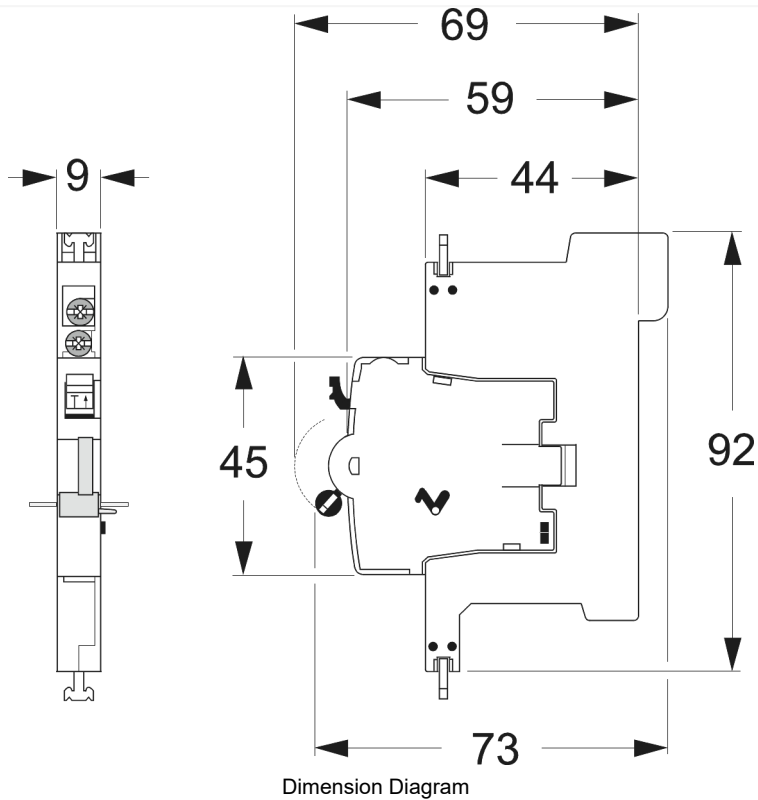

Function H

Function S

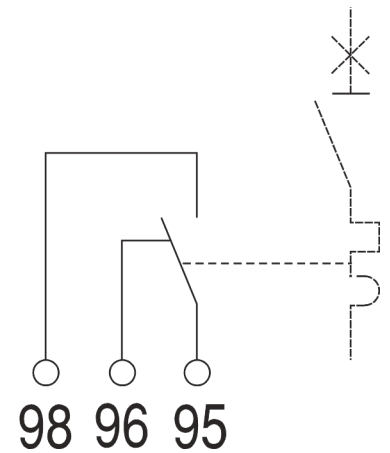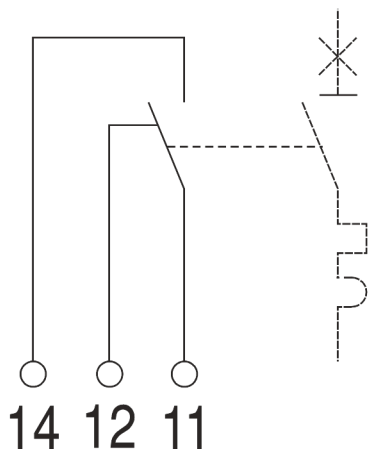

Connection / Wiring Diagram