Catalogue No: MOLED80-04R

BEACON 12 LED ST OR FL 85-265V AC RED

Signalling Devices > Sight Indication > Beacons > Moflash Beacons > LED Beacons > MOLED80 Series - LED Beacons





LED Beacon 110/230V AC - IP67 Clear Lens - Red LEDs

- Complete visual signalling range from high efficiency static or flashing LED's to high discharge Xenon beacons to rotating parabolic reflector beacons, we have the solution suitable for your application.
- Available in a variety of frame sizes and with accessories such as protective cages and brackets to cater to your mounting requirements.
- Multiple colour varieties available including Red, Green, Amber and Blue to convey whichever message is required.

Representative Photo Only

(actual product may	vary based on	configuration	selections)
---------------------	---------------	---------------	-------------

SPECIFICATIONS


SPECIFICATIONS		
Product Series	LED80	
Indication Mode(s)	Sight	
Lamp Type	LED type	
Number of LEDs	12	
Colour, Lamp	Red colour	
Illumination Mode	Steady / Flashing	
Speed, Flash	60 per min	
Material, Lens	PC (Polycarbonate) - UV Stabilised	
Un, Nominal Operational Voltage(s), AC	115 V AC 230	
le, Rated Operational Current, nom	0.02 A,nom	
le, Rated Operational Current, nom	0.02 A,nom	
Material, Body / Housing	PC (Polycarbonate) - UV Stabilised material	
Connection / Termination	Built-in cable with flying leads	
Length, Cable	0.5 m	
IP Rating	IP67	
Mounting (Multiple)	Mounting Plate (Included) Surface Mount	
Diameter, External	76 mm	
Weight	0.14 kg	
Operating Temperature, Min	-20 °C min	
Operating Temperature, Max	55 °C max	
Certifications	CE RoHS	




Catalogue No: MOLED80-04R

BEACON 12 LED ST OR FL 85-265V AC RED

Signalling Devices > Sight Indication > Beacons > Moflash Beacons > LED Beacons > MOLED80 Series - LED Beacons

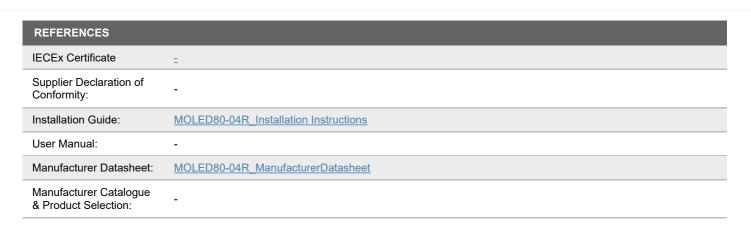

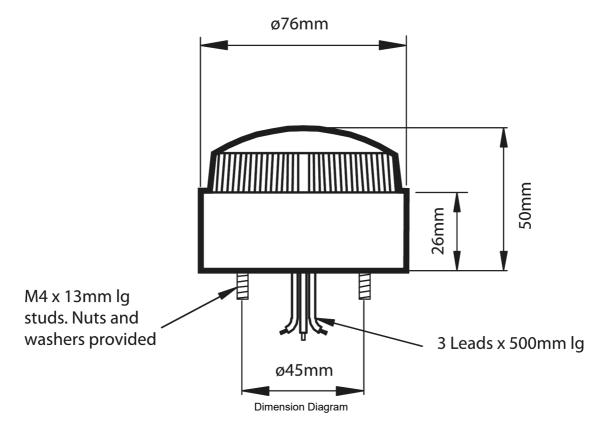



Catalogue No: MOLED80-04R

BEACON 12 LED ST OR FL 85-265V AC RED

Signalling Devices > Sight Indication > Beacons > Moflash Beacons > LED Beacons > MOLED80 Series - LED Beacons



