



SIRCO M CHANGEOVER SWITCH I-0-II DIRECT HANDLE 20A 3POLE

- Standard (I-0-II) and make before break (I-I&II-II) options available covering any application requirement
- Three stable positions (I-O-II) not affected by voltage drops or vibrations ensuring the connected load is protected against possible network interference
- Easy connections thanks to copper bar connection kit accessory for 2000 to 3200A switches enabling the use of flat or edgewise connection with top or bottom bridging.
- Compatibility with the ergonomic IP65 S-Type Handles which features interlocking (in the ON position), padlocking, UV and chemical agent resistive material and the choice of standard blue or red / yellow colour

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Component Type Power Distribution & Protection	Manual Changeover Switch
Switch Body Item Number	22003001
Number of Poles	3
Ui, Rated Insulation Voltage	800 V (rms)
Uimp, Impulse Withstand Voltage	8 kV
Ie, Rated Operational Current, AC-21a, 400V	20 A@400V
Ie, Rated Operational Current, AC-23a, 400V	20 A@400V
Standards Compliance	IEC 60947-3
kW Rating, AC-23a, 415V, 3ph	9 kW @415V
kW Rating, AC 23b, 415V, 3ph	9 kW
kW Rating, AC-23a, 400V, 3ph	9 kW @400V
Current, Fuse-Protected Short-Circuit Capacity, 400V	50 kA
Mechanical Service Life	10000 cycles
Weight	0.41 kg
Tightening Torque, Min	2 Nm
Cable Cross Section (Min)	1.5 mm ²
Cable Cross Section (Max)	16 mm ²
Ie, Rated Operational Current, AC-23a, 415V	20 A@415V
Icw, short time withstand current, 1s (rms)	1.26 kA for 1s
Ie, Rated Operational Current, AC-21a, 415V	20 A@415V

REFERENCES

IECEx Certificate -

Supplier Declaration of Conformity: -

Installation Guide: -



User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue & Product Selection: -

SIRCOVER SCO 20 to 1600 A

Direct front operation for 6/8 pole SIRCO M load-break switches or 3/4 pole SIRCOVER M changeover switches

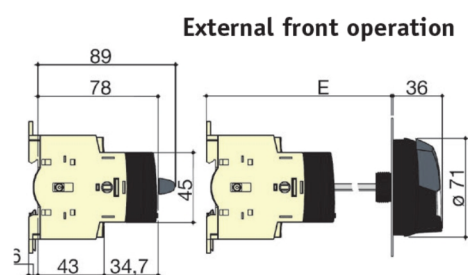

	Overall dimensions			Switch body			Mounting		Connection terminals	
Rating (A)	E min.	E max.	F	F1	G	J	M	N	M	N
16...40	105	372	97.5	45	68	48.75	30	75	15	7.5
63...80	105	372	105	52.5	76	52.5	35	85	17.5	8.75

Dimension Diagram