


SV Series Proximity Level Control Relay, 230 V AC power supply, 8A SPDT output relay, discharging function, IP20 B rating, with vibration retaining spring clip and timer 11 pin plug in base included

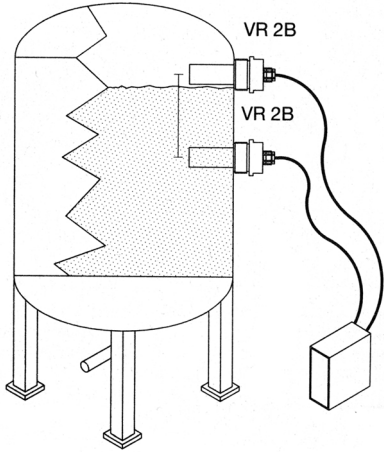

- Wide range of operating voltages, current ratings and output types
- Extensive range of different housing styles and mounting options
- Specialised versions with IP69K rating available for high-pressure washdown applications for food and beverage industry
- Specialised loop detector sensors available which are utilised for vehicle detection in the control of boom-gates
- 5m cable supplied with all sensors with plug-versions

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	SV
Shape	Rectangular
Mounting (Multiple)	DIN-35 Rail Mount
Power Supply	230V AC, Single Phase
Output Type	DPDT Relay
Switching/Operating Frequency	2 Hz
Connection / Termination	Fixed (non-removable) Terminal Block
Material, Body / Housing	Plastic material
Operating Temperature, Max	50 °C max
Operating Temperature, Min	-20 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-50 °C min
IP Rating	IP20

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	SV260230_ManufacturerDatasheet
Manufacturer Catalogue & Product Selection:	-