

Catalogue No: **T2CF123SLNG**

T2 TERMINAL COVER FC FOR E/S125 3P

Power Distribution and Protection > Circuit Breakers > Moulded Case Circuit Breakers > TemBreak2 Accessories > TemBreak 2 External Accessories 125 AF to 1600 AF > Terminal Cover Standard Type T2CF



TB2 Front Connect Terminal Cover 3P E/S125 AF



Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

| | |
|------------------------------------|------------------------------------|
| Product Series | TemBreak 2 - CF |
| Compatible Product Series' | E125 S125 |
| Details, compatible product series | E125, S125 |
| Component Type MCCB | Terminal Cover / Interpole Barrier |
| Number of Poles | 3 |
| Compatible Frame Size(s) | 125 AF compatible |
| Package Quantity | 2 qty |
| Length | 40 mm |


REFERENCES

| | |
|---------------------------------------------|---|
| IECEX Certificate | - |
| Supplier Declaration of Conformity: | - |
| Installation Guide: | - |
| User Manual: | - |
| Manufacturer Datasheet: | - |
| Manufacturer Catalogue & Product Selection: | - |

Catalogue No: T2CF123SLNG

T2 TERMINAL COVER FC FOR E/S125 3P

Power Distribution and Protection > Circuit Breakers > Moulded Case Circuit Breakers > TemBreak2 Accessories > TemBreak 2 External Accessories 125 AF to 1600 AF > Terminal Cover Standard Type T2CF

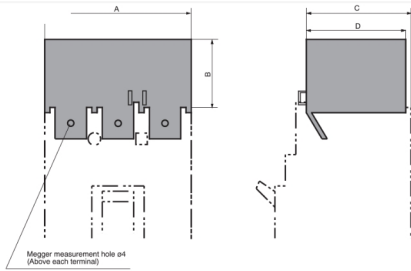

Dimensions (in mm)

| Breaker | Connection | A | | | B | | | B ¹ | | C | | | D | | |
|-----------------------------|------------------------------|----|-----|-----|-----|-----|-----|----------------|------|-----|-----|------|------|------|----|
| | | 1P | 3P | 4P | 1P | 3P | 4P | 3P | 4P | 1P | 3P | 4P | 1P | 3P | 4P |
| E125, S125, ZS125 | Front (long) | 30 | 90 | 120 | 40 | 40 | 40 | — | 48 | 48 | 48 | 46 | 46 | 46 | |
| | Front (short) | — | 90 | 120 | — | 22 | 22 | — | — | 48 | 48 | — | 46 | 46 | |
| | Tunnel clamp | 30 | 90 | 120 | 2.5 | 2.5 | 2.5 | 6 | 62.5 | 61 | 61 | 60 | 59.5 | 59.5 | |
| S160 | Front ¹⁾ (long) | 35 | 105 | 140 | 55 | 55 | 55 | — | 54 | 54 | 54 | 52 | 52 | 52 | |
| E250, S250 (except S250-PE) | Front (short) ¹⁾ | — | 105 | 140 | — | 30 | 30 | — | — | 54 | 54 | — | 52 | 52 | |
| ZS250 | Tunnel clamp | 35 | 105 | 140 | 2.5 | 2.5 | 2.5 | 6 | 63 | 61 | 61 | 49.5 | 59.5 | 59.5 | |
| H125, L125, H160, L160 | Front ¹⁾ | — | 105 | 140 | — | 55 | 55 | — | — | 89 | 89 | — | 87 | 87 | |
| H250, L250, S250-PE | Tunnel clamp | — | 105 | 140 | — | 2.5 | 2.5 | 4.5 | — | 96 | 96 | — | 59.5 | 59.5 | |
| E400, S400 | Front (wide) | — | 140 | 185 | — | 110 | 110 | — | — | 97 | 99 | — | 96 | 98 | |
| E630NE, S630CE, S630GE | Front (wide) | — | 180 | 240 | — | 110 | 114 | — | — | 97 | 99 | — | 96 | 98 | |
| | Front (narrow) ¹⁾ | — | 140 | 185 | — | 80 | 85 | — | — | 134 | 134 | — | 93 | 93 | |
| H400, L400 | Tunnel clamp | — | 140 | 185 | — | 3 | 3 | 4.5 | — | 97 | 97 | — | 93 | 93 | |
| | Front (wide) | — | 180 | 240 | — | 110 | 114 | — | — | 134 | 136 | — | 96 | 98 | |
| | Tunnel clamp | — | 140 | 185 | — | 3 | 3 | 4.5 | — | 134 | 134 | — | 93 | 93 | |

Note: ¹⁾ Not applicable when flat bars (FB) are fitted.

Dimension Diagram