SCREW TERMINAL SENSOR 2.5mm 3 CONDUCTOR 24A

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screw > Sprecher + Schuh Screw Type Terminals V7-W > Triple Deck Terminal Blocks

NHP

Representative Photo Only
(actual product may vary based on configuration selections)

Terminal Triple Deck 2.5mm² Grey

- Designed for ease of wiring, secure connections and durability
- Comprehensive range, offering a wide array of terminal types for most circuits and functions
- Terminals accommodate a full range of wire sizes from 0.5 to 70mm² wire cross section
- Cone shaped guide allows easy wire insertion
- Specialty terminals including two-level, grounding, diode, isolating, fuse, sensor and thermocouple terminals
- International approvals, UL recognized, IEC and CSA certified.

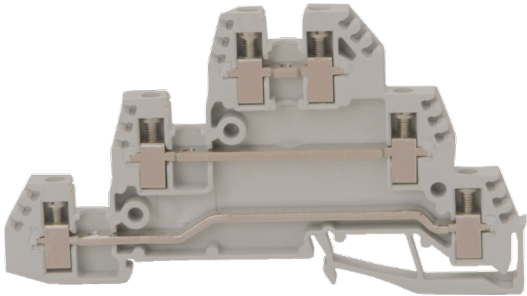| SPECIFICATIONS	
Product Series	V7
Component Type Termination Wiring	Terminal
Number of Levels	3
Package Quantity	50 qty
Colour, Body / Housing	Grey colour
Wire / Conductor Size (Min)	0.5 mm² min
Wire / Conductor Size (Max)	2.5 mm²
Wire Strip Length	8 mm
Tightening Torque, Nominal	0.5 Nm
In, Rated Current	24 A
Un, Nominal Voltage	250 V
Height	89.9 mm
Width	5.1 mm
Depth	44.1 mm
Insulation Temperature (Min)	-40 °C
Insulation Temperature (Max)	90 °C
Standards Compliance	IEC 60947-1 IEC 60947-7-1 IEC 60947-7-2 CSA C22.2 No.158 UL 1059 UL 457 UL 486E
Certifications	CSA UR

Catalogue No: **V7-WTF3**

SCREW TERMINAL SENSOR 2.5mm 3 CONDUCTOR 24A

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screw > Sprecher + Schuh Screw Type Terminals V7-W > Triple Deck Terminal Blocks

REFERENCES	
IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	V7WTF3_Manufacturer Catalogue

1.74" (44.1mm)

3.54" (89.9mm)

0.20" (5.08mm)

Dimension Diagram