
# 64991030-03A | 64991030-03A





#### **Product Classification**

Regional Availability Asia | Australia/New Zealand

Portfolio NETCONNECT®

Product Type Twisted pair cable

#### General Specifications

ANSI/TIA Category 6

Cable Component Type Horizontal

Cable Type U/UTP (unshielded)

Conductor Type, singles Solid
Conductors, quantity 8

Jacket Color Blue

Pairs, quantity 4

**Transmission Standards** ANSI/TIA-568.2-D | ISO/IEC 11801 Class E

#### **Dimensions**


Cable Length304.8 m | 1000 ftDiameter Over Jacket, nominal6.401 mm | 0.252 in

Conductor Gauge, singles 23 AWG

#### Cross Section Drawing



## 64991030-03A | 64991030-03A

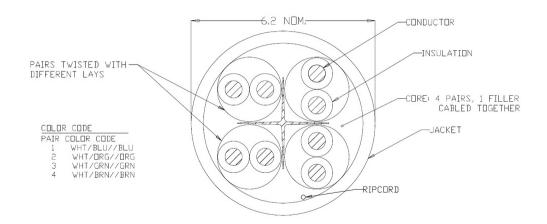

#### **Electrical Specifications**

Operating Voltage, maximum 80 V

**Remote Powering** Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery

of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1,

CENELEC EN 50174-2 or TIA TSB-184-A

#### Material Specifications

**Conductor Material** Bare copper

Jacket Material PVC

#### **Environmental Specifications**

Flame Test Method CM | IEC 60332-1

## Packaging and Weights

Packaging Type Reel

### Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant

**COMMSCOPE®** 

# 64991030-03A | 64991030-03A



