

# PRODUCT DATASHEET

## L 32 W/840 C G10Q

LUMILUX T9 C | Circular fluorescent lamps 29 mm, with G10Q base



---

### AREAS OF APPLICATION

- Public buildings
- Restaurants
- Industry
- Shops
- Supermarkets and department stores
- Hotels

---

### PRODUCT BENEFITS

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Excellent uniform illumination with no shadows

---

### PRODUCT FEATURES

- Good color rendering group: 1B ( $R_a$ : 80...89)
- Good average lifetime
- Single-ended round fluorescent lamp
- Dimmable



**TECHNICAL DATA**


Electrical data

Nominal wattage	32.00 W
Rated wattage	32.00 W

Photometrical data

Light color	0
Color rendering index Ra	80...89

Dimensions & weight

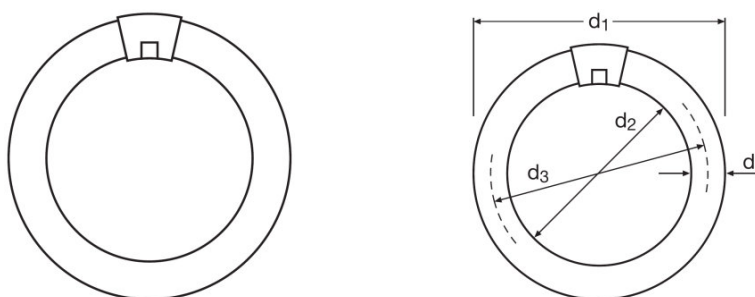

Length	305.0 mm
Diameter	29.0 mm

Lifespan

Service life	5000 h
Lifespan	9000 h
Rated lamp life time	5000 h
Nominal lamp life time	5000 h

Additional product data


Base (standard designation)	G10q
Mercury content	3.0 mg
Show WEEE picto	Yes

**EQUIPMENT / ACCESSORIES**

- Suitable for operation on electronic and conventional control gears

**SAFETY ADVICE**

In case of lamp breakage: [www.ledvance.com/brokenlamp](http://www.ledvance.com/brokenlamp)



Circuit diagram

**LOGISTICAL DATA**

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321530769	L 32 W/840 C G10Q	Shipping carton box 12	452 mm x 323 mm x 320 mm	46.72 dm <sup>3</sup>	4305.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.