

FLEXIBLE COPPER BRAIDS


Flexible Copper Braids are an extremely flexible lead, which are typically used on disconnects and switch handle grounds. They can also be used to take up linear expansion and contraction, or absorb vibration.

- Seamless pure copper ferrules are formed into a rectangular shape on each end
- Standard braids are supplied with tinned braid, and plated ferrules
- Single or double hole available as standard
- Special ends and braid types are available on request
- Note the "length" of the braid is between centre of the first holes

Shown below is our standard range, specials can be made up on request. To assist quotation, please print the form on the following page, fill in the details and send to CABAC sales.

Part No.	Amp Rating (Approx)	No. of Ferrule Holes	Length	Width	Ferrule	Spacing	Stud Hole	No. of Braids
			L	W	A	B		
			Dimensions (mm)					
Single Hole Version								
CAB100A-300M12	100	1	300	22	25	—	13	1
CAB300A-300M12	300	1	300	25	36	—	13	2
CAB450A-300M12	450	1	300	30	36	—	13	3
CAB600A-300M12	600	1	300	35	40	—	13	4
Two Hole Version								
CAB100A-300M12X2	100	2	300	22	50	25	13	1
CAB300A-300M12X2	300	2	300	25	60	30	13	2
CAB450A-300M12X2	450	2	300	30	60	30	13	3
CAB600A-300M12X2	600	2	300	35	70	35	13	4


Note: The amperage rating is nominal, and depends on environment, for example indoor or outdoor. Consult with CABAC engineering if unsure. Generally indoor de-rate nominal rating by 20%.

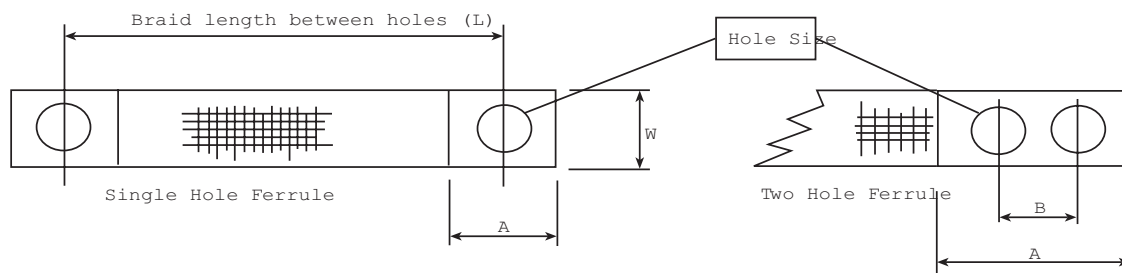

Part numbers are made up according to the following legend:

- Amperage
- Length between first holes (mm)
- Stud Size (mm) – hole will be clearance
- No. of holes

Typical Part No: CAB 300A – 600 M12 X2

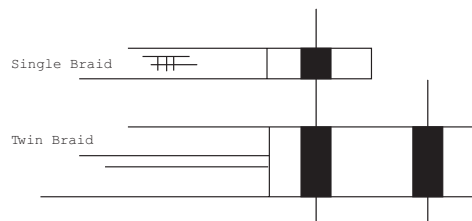

MKT286

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.

FLEXIBLE COPPER BRAIDS

BRAID DETAILS - SPECIAL MANUFACTURE

Order Number: _____

Part Number: _____

Date: _____

Customer Contact:

CABAC Contact:

Company: _____

Name: _____

Contact: _____

Phone: _____

Phone: _____




Fax: _____

Fax: _____

Mobile: _____

Date Delivery Required

Qty Required

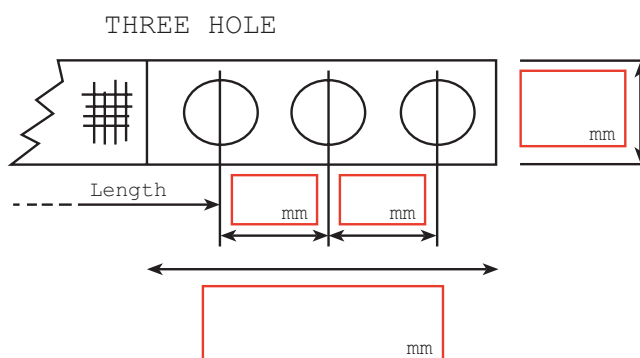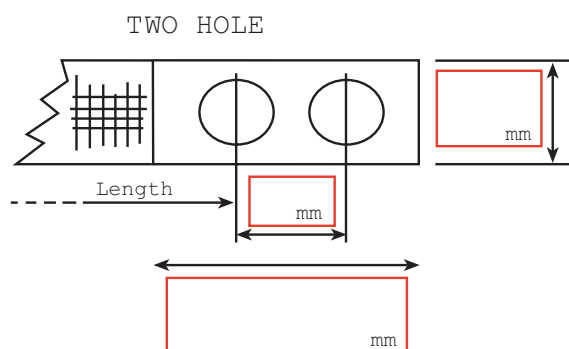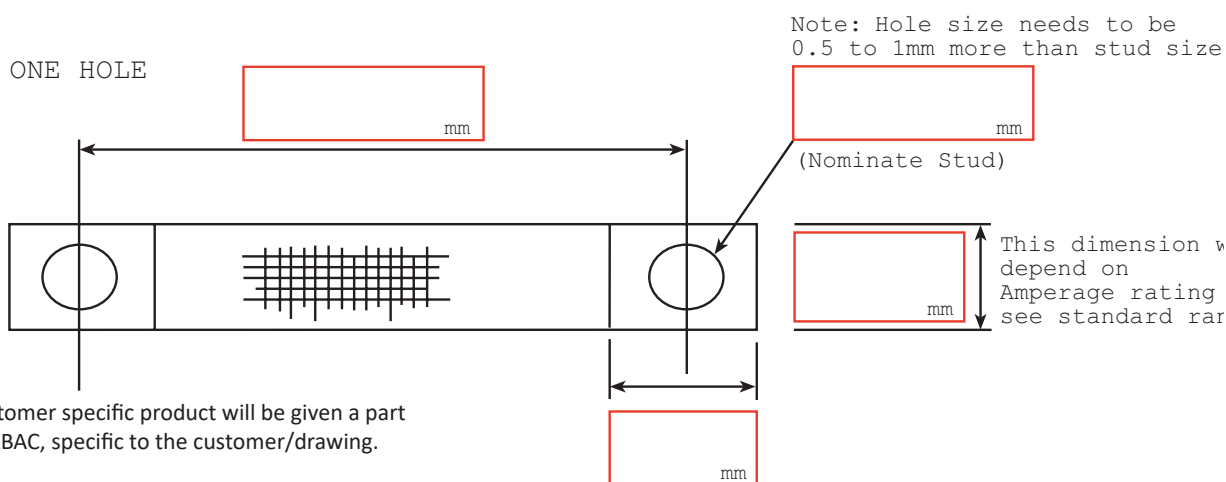

SPECIALLY MANUFACTURED GOODS ARE NOT RETURNABLE FOR CREDIT

Customer Approval: _____

Date: _____

MKT286

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.