170ADM39030

discrete I/O module Modicon Momentum - 10I / 8O relay





Main

| Range of product | Modicon Momentum automation platform |
|---------------------------|---|
| Product or component type | Discrete relay I/O base DC |
| Group of channels | 1 group of 10 inputs 2 groups of 4 outputs |
| Discrete input number | 10 IEC 1131-2 Type 1 |
| Discrete input logic | Positive |
| Discrete input voltage | 20115 V AC |
| Discrete output number | 8 |
| Discrete output type | Relay normally open |
| Discrete output voltage | 20115 V DC |
| Protective treatment | TC |

Complementary

| Complementary | | |
|------------------------------------|---|--|
| [Us] rated supply voltage | 24 V DC | |
| Input voltage limits | - 330 V | |
| Network frequency | 4763 Hz | |
| Voltage state 0 guaranteed | -35 V | |
| Voltage state 1 guaranteed | 1130 V | |
| Current state 0 guaranteed | <= 1.2 mA | |
| Current state 1 guaranteed | >= 2.5 mA | |
| Input resistance | 4 kOhm | |
| Discrete output current | <= 0.15 mA 115 V inductive <= 0.5 mA 115 V resistive <= 1 mA 24 V inductive <= 2 mA 24 V resistive >= 0.005 A 24 V | |
| Leakage current | < 1 mA 230 V output circuit | |
| Mechanical durability | <= 30000000 cycles | |
| Electrical durability | <= 100000 cycles inductive | |
| Response time | 2.2 ms from state 0 to state 1 on input 3.3 ms from state 1 to state 0 on input 10 ms 60 Hz from state 0 to state 1 on output 10 ms 60 Hz from state 1 to state 0 on output | |
| Isolation between channels and bus | 500 V AC | |
| Power dissipation | <= 8.5 W 5.5 W | |
| Protection type | Without protection | |
| Associated fuse rating | <= 4 A fast blow input voltage <= 8 A slow-blow output voltage per group 375 mA fast blow operating voltage | |
| Marking | CE | |
| Terminals description PLC n°1 | (1)IN_DIS#1 (10)IN_DIS#10 (1L+)PW_POS (2)IN_DIS#2 (3)IN_DIS#3 (4)IN_DIS#4 (5)IN_DIS#5 (6)IN_DIS#6 (7)IN_DIS#7 (8)IN_DIS#8 (9)IN_DIS#9 | |

| | (L+)PW_POS (M-)PW_NEG TB | |
|-------------------------------|--|--|
| Terminals description PLC n°2 | (1)OUT_DIS#1 (1L+)PW (2)OUT_DIS#2 (2L1)PW (3)OUT_DIS#3 (4)OUT_DIS#4 (5)OUT_DIS#5 (6)OUT_DIS#6 (7)OUT_DIS#7 (8)OUT_DIS#8 TB_1 | |
| Current consumption | 250 mA 24 V DC | |
| Depth | 47.5 mm | |
| Height | 141.5 mm | |
| Width | 125 mm | |
| Product weight | 0.26 kg | |

Environment


| CSA UL |
|---|
| 4 kV contact IEC 801-2 8 kV on air IEC 801-2 |
| 10 V/m 801000 MHz IEC 801-3 |
| 060 °C |
| -4085 °C |
| 95 % without condensation |
| <= 5000 m |
| |

Offer Sustainability

| Sustainable offer status | Green Premium product |
|----------------------------------|---|
| RoHS (date code: YYWW) | Compliant - since 1350 - Schneider Electric declaration of conformity |
| REACh | Reference not containing SVHC above the threshold |
| Product environmental profile | Available |
| Product end of life instructions | Available |


Standard Adapter on a Typical Base

Dimensions

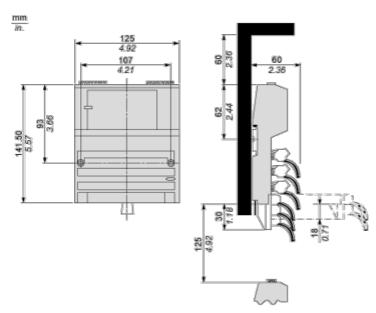




Mounting on a Wall




External Wiring Diagrams

3-Wire Sensor with a 2-Wire Actuator

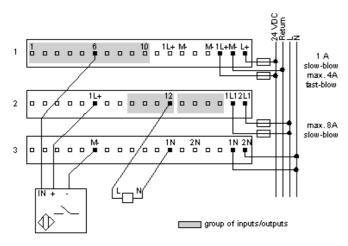


4-Wire Sensor with a 3-Wire Actuator

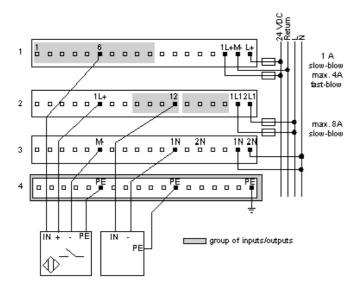

Internal Pin Connections

Rows 1 through 3 show the internal connections between terminals on the I/O base. Row 4 shows the internal connections on the optional busbar.

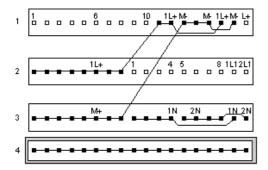

■—■internally connected