


U.R.D. PILLARS

PLASTIC

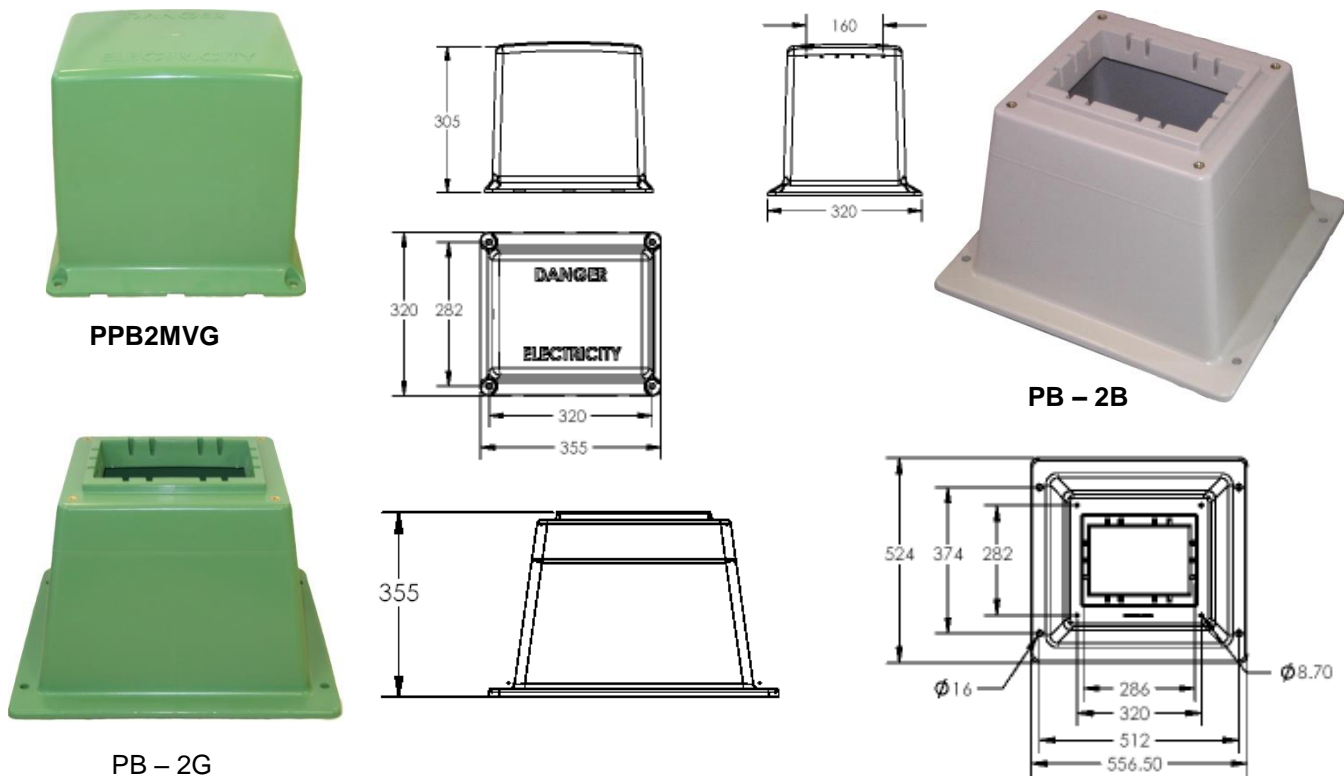

****NOTE: BEIGE COLOUR PILLAR AND BASE AVAILABLE ****

CATALOGUE NO.	DESCRIPTION	SIZE (mm)	COLOUR	WEIGHT (kg)
PPB2MVG	POLY PILLAR – VENTED	305H x 355W x 320D	GREEN	1.6
PPB2MVB	POLY PILLAR – VENTED	305H x 355W x 320D	BEIGE	1.6
PB – 2G	POLY BASE – SLOTTED	355H x 556W x 524D	GREEN	2.8
PB – 2B	POLY BASE – SLOTTED	355H x 556W x 524D	BEIGE	2.8
PB – 2G/1	POLY BASE WIDE OPENING	355H x 556W x 524D	GREEN	2.7
PPB2MG	POLLY PILLAR – NON VENTED	305H x 355W x 320D	GREEN	2.7
PDP190	PLASTIC DISTRIBUTION PANEL	190H x 205W x 10 THICK	BLACK	0.26
PDP280	PLASTIC DISTRIBUTION PANEL	280H x 205W x 10 THICK	BLACK	0.385
BDP240	TYPE X SWITCHPANEL	240H x 205W x 10 THICK	BLACK	0.7
BDP240W	TYPE X SWITCHPANEL	240H x 283W x 10 THICK	BLACK	0.95
PSFB2	SECURITY BOLTS/WASHER	4 PER PILLAR	G304 S/STEEL	
PSDB30	'D' HEAD BOLT/WASHERS (4 PER PILLAR)	4 PER PILLAR	G304 S/STEEL	
SLP – 3	LOCKING PLATE TO SUIT PADLOCK	1 PER PILLAR	G304 S/STEEL	
SLB – 2	LOCKING BOLT FOR SLP-3	1 PER PILLAR	G304 S/STEEL	

The Locking Plate and Bolt are optional. Only 3 security bolts/ washers are required if used with locking bolt. Pillars and Bases are Fire Retardant to 750°C and UV stabilized. Panels are blank unless quoted to include accessories. NATA Test Reports available upon request.



ALLEN KEY
OR 'D' BOLT
SPANNER



PSFB2



PSDB30



SLB – 2



SLP– 3