


# ELECTRA CABLES

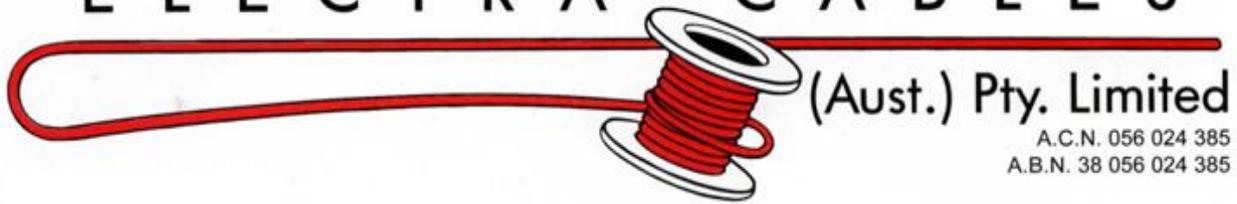


(Aust.) Pty. Limited

A.C.N. 056 024 385  
A.B.N. 38 056 024 385

## Flexible Cord Speaker Cable

PVC V90 Copper or Tinned copper conductor Flexible Cable.

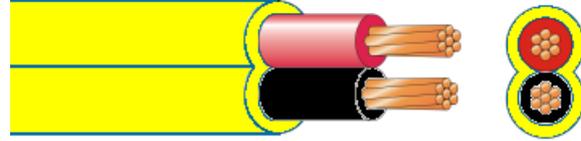

**Application:** For wiring of audio, electronic and allied equipment. Suitable for use on speaker and home theatre connections.

**Conductor:** Plain annealed copper wire

**Insulation:** PVC 90°C (AS3808)

**Sheath:** PVC 90°C (Yellow)

**Core Colour:** 2Core: Red & Black, 4Core: Red, White, Black, Green

**CAUTION**  
Low Voltage – Should NOT be connected to mains power supply

### Typical Features:

Electra Cables Part No.	Nominal area mm <sup>2</sup>	No. of cores	Stranding No/mm	Nominal O.D. mm	Insulation Thickness mm	Amp Rating	Electrical Resistance @ 20°C Ω/Km
SP2015	1.5	2	30/0.25	7.1	0.5	15	13.3
SP4015	1.5	4	30/0.25	8.2	0.5	15	13.3

**Conductor:** Tinned Copper

**Sheath:** Clear with a black trace

Electra Cables Part No.	Nominal area mm <sup>2</sup>	No. of cores	Stranding No/mm	Nominal O.D. mm	Insulation Thickness mm	Amp Rating	Electrical Resistance @ 20°C Ω/Km
SP2825	2.5	2	84/0.2x2	8.2x3.8	0.9	20	8.0