



DATA SHEET:

SOLAR HEAVY DUTY PVC RIGID & CORRUGATED CONDUIT (SOLAR)

100% AussieMade


AUSTRALIAN MADE BY AN AUSTRALIAN OWNED COMPANY, AUSSIE DUCT SOLAR HEAVY DUTY CONDUIT IS SUITABLE FOR INDOOR AND OUTDOOR INSTALLATIONS. MANUFACTURED TO AUSTRALIAN STANDARD AS/NZS2053, AS/NZS5033:2012 AND CONFORMS WITH "BEST PRACTICE GUIDELINES FOR PVC IN THE BUILT ENVIRONMENT" (GREEN STAR). WE ALSO MANUFACTURE A RANGE OF BENDS AND ASSOCIATED CONDUIT FITTINGS FOR OUR RIGID & CORRUGATED SOLAR CONDUIT.



TECHNICAL SPECIFICATION	
MATERIAL	PVC-U
COLOUR	GREY
DUTY RATING	HEAVY (HD-T)
PRODUCT STANDARD	AS/NZS2053.2 & 5033:2012
UV RESISTANT	YES - UV (T) STABILISED
B.E.P CERTIFIED	YES (CERTIFICATE: 4008)
TEMPERATURE RANGE	0-60°C
DIELECTRIC STRENGTH	ELECTRO-INSULATING
FLAME PROPAGATION	NON-FLAME PROPAGATING
QUALITY MANAGEMENT SYSTEM	ISO9001:2015 (CERTIFICATE: QEC0597)


AS/NZS2053.2 & 5033:2012 COMPLIANT

'SOLAR' PRINTED ON BOTH RIGID & CORRUGATED CONDUITS

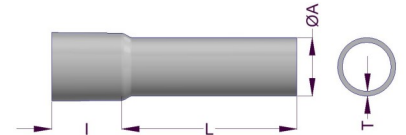

RIGID ONLY	
IP INGRESS PROTECTION	IP66* (*FULLY SOLVENT CEMENTED AUSSIE DUCT CONDUIT SYSTEM)

CORRUGATED ONLY	
COMPRESSION RESISTANCE	1250N/5CM

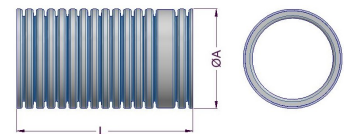

PRODUCT CODE	NOMINAL SIZE (mm)	EFFECTIVE LENGTH (M) L	MEAN O.D.	WALL THICKNESS (mm) T	SOCKET LENGTH (mm) I	BUNDLE QTY	CRATE QTY
RC25HDSOLAR	25	4	25	2.5	35	10	780
RC32HDSOLAR	32	4	32	2.7	40	10	350

Product Code	Size	Coil Length (L)	Nominal Size (ØA)	Pack Qty	Pallet Qty	Draw Wire
CC20GRSOLAR	20mm	50m	20mm	1	30	
CC25GRSOLAR	25mm	50m	25mm	1	25	
CC32GRSOLAR	32mm	25m	32mm	1	25	