


NSYTRV42SF5LD

Fuse disc. terminal, 4mm² 6.3A, 5x20mm fuse, LED
12-30V, 1x1 screw, black

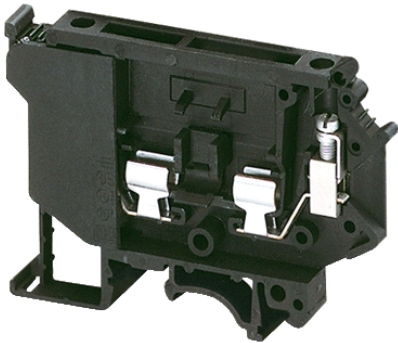

Main

Range	Linery
Product name	Linery TR
Product or component type	Terminal block
Device short name	TRV
Terminal block type	Fused disconnect
Terminal block level	1
Mounting mode	Clip-on
Nominal cross section	4 mm ²
Length	72.5 mm
Colour	Black
Quantity per set	Set of 50

Complementary

Fuse size	5 x 20 mm
Width	8.2 mm
Height	56.5 mm
Connections - terminals	1 x screw terminal : upstream 1 x screw terminal : downstream
Number of terminals	2
Connection position	Sideways
Number of measurement input	0
Cable cross section	0.2...4 mm ² , flexible without 0.2...4 mm ² , solid
Tightening torque	0.5...0.8 N.m
Wire stripping length	8 mm
Tool type	Connection : screwdriver Disconnection : screwdriver
[Ue] rated operational voltage	500 V conforming to EN/IEC 60947-7-1 600 V CSA 600 V cURus
[In] rated current	6.3 A conforming to EN/IEC 60947-7-1 12 A cURus 6.3 A CSA
Material	Polyamide 6/6 (insulating case)
Dielectric loss	0.01 at 1 MHz conforming to IEC 60250 0.01 at 1 MHz conforming to VDE 0303-T4
Dielectric constant	3.7 at 1 MHz
Resistivity	10000 MΩ.m MΩ.m conforming to IEC 60093 10000 MΩ.m MΩ.m conforming to VDE 0303-T30
Surface resistance	1000 GΩ GΩ conforming to IEC 60093 1000 GΩ GΩ conforming to VDE 0303-T30
Creep resistance	500 CTI (> 400 kB) conforming to IEC 60093 500 CTI (> 400 kB) conforming to VDE 0303-T30
Flame retardance	V0, thickness 0.8 mm conforming to UL 94
Product weight	20 g
Provided equipment	Light indicator (12...30 V)
Range compatibility	Prisma - G Prisma - P Pragma Prisma - PH Prisma - Pack Spacial

Kaedra
TeSys

Product compatibility	Spacial enclosures
-----------------------	--------------------

Environment

product certifications	CSA CURus EAC
dielectric strength	1000 V conforming to IEC 60243-1
ambient air temperature for operation	-40...130 °C conforming to IEC 60216-1 -40...130 °C conforming to VDE 0304-T21

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1052 - Schneider Electric declaration of conformity
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations
