



garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.


Part No: MCP7032S

Description	Stranded 20AWG PACW, 2 Twisted Pairs, V-90HT PVC Insulated, Aluminium Polyester Tape Overall Screen, TACW 22AWG Drain Wire, 5V-90 PVC Sheath.
Applicable Standards	AS/NZS 1125 , AS/NZS 3808 , IEC60332-1
Suitable Applications	Instrument and control cable for use in industrial applications including the interconnection of signals between cabinets, consoles, sensors and display panels. Can also be used for carrying low bit rate data signals.
	Not suitable for direct connection to mains voltages.

Cable Construction Drawing



Cable Construction Relative Parts

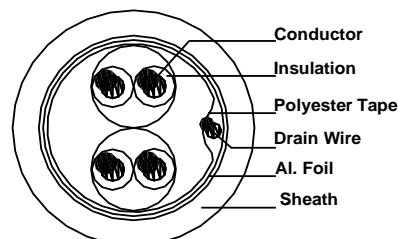

Cable Description					
Conductor	AWG	Stranding	Area(mm ²)	Diameter(mm)	Material
	20	7/0.30	0.5	0.91	PACW
Insulation	Pairs : 2		Material : V-90HT PVC		
	Material :		Black and White form a Pair.		
	Colour :		Pair nos. printed on each pair for identification		
	Nominal Thickness (mm) :		0.3		
	Nominal OD (mm) :		1.6		
Pair Screen	Material: Al. Polyester Tape			Coverage: 100%	
Overall Screen	Material: Al. Polyester Tape			Coverage: 100%	

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

MCP7032S-150225.docx

made by



Instrumentation Cable



garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Drain Wire	AWG	Standing	Area(mm ²)	Diameter(mm)	Material
	22	7/0.25	0.34	0.75	TACW
Sheath	Material : 5V-90 PVC Colour : Black Nominal Thickness (mm) : 0.75 Nominal OD (mm) : 6.8				

Electrical Properties

Max. Conductor DC Resistance @ 20°C	38.4Ω/km
Mon. Impedance @ 1KHz	380ohm
Max. Capacitance Core to Core @ 1KHz	85pF/m
Max. Inductance @ 1KHz	1.1μH/m
Max. Current Rating	3A
Suggest Voltage Rating	110a.c /150d.c

Mechanical Properties

Operating Temperature Range	-15 to 90°C
Max. Recommended Pulling Tension	139N
Min. Bend Radius (install)	68mm
Approximate Mass	6.1kg/100m

Sheath Printing GARLAND 2PAIR 0.5mm² INSTRUMENTATION CABLE
MCP7032S - MM/YYYY - "Mmark"

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
100	Plastic Reel	10 x 4.5 x 5.5"	4R	
500m	Wooden Reel	W42x H21.8cm	1R	

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

MCP7032S-150225.docx

made by



madison