



garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.


Part No: MCP7051SSWA

Description	Stranded 16 AWG PACW, Single Twisted Pairs, V-90HT PVC Insulated, Aluminium Polyester Overall Screen, TACW 22AWG Drain Wire, 5V-90 PVC Bedding SWA & 5V-90 PVC Sheath.
Applicable Standards	AS/ACIF S008, AS/NZS 1125, AS/NZS 3808
Suitable Applications	Instrument and control cable for use in industrial applications including the interconnection of signals between cabinets, consoles, sensors and display panels. Can also be used for carrying low bit rate data signals.
	Not suitable for direct connection to mains voltages.

Cable Construction Drawing



Cable Construction Relative Parts

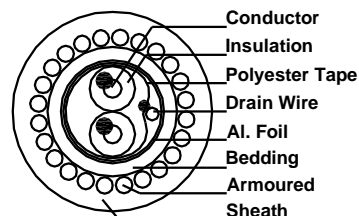

Cable Description

Conductor	AWG	Standing	Area(mm ²)	Diameter(mm)	Material
	16	7/0.50	1.5	1.5	PACW
Insulation	Pairs : 1 Material : V-90HT PVC Colour : Black and White wires form a Pair. Pair nos. printed on each pair for identification Nominal Thickness (mm) : 0.3 Nominal OD (mm) : 2.2				
Screen	Material: Al. Polyester Tape		Coverage: 100%		
Drain Wire	AWG	Standing	Area(mm ²)	Diameter(mm)	Material
	22	7/0.25	0.34	0.76	TACW

Instrumentation Cable

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

MCP7051SSWA-150226.docx

made by





garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Bedding	Material : 5V-90 PVC Colour : Black Nominal Thickness (mm) : 0.7 Nominal OD (mm) : 6.1
Armoured	Material: SWA Coverage: >90%
Sheath	Material : 5V-90 PVC Colour : Black Nominal Thickness (mm) : 1.4 Nominal OD (mm) : 10.7

Electrical Properties

Max. Conductor DC Resistance @ 20°C	13.6Ω/km
Min. Impedance @ 1KHz	280ohm
Max. Capacitance Core to Core @ 1KHz	110pF/m
Max. Inductance @ 1KHz	1.1μH/m
Max. Current Rating	13A
Suggest Voltage Rating	110a.c/150d.c

Mechanical Properties

Operating Temperature Range	-15 to 90°C
Max. Recommended Pulling Tension	1819N
Min. Bend Radius (install)	130mm
Approximate Mass	22.8kg/100m
Sheath Printing	GARLAND 1PAIR 1.5mm ² INSTRUMENTATION CABLE MCP7051SSWA - MM/YYYY - "Mmark"

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
500m	Wooden Reel	W58 x H46cm	1R	
1000m	Wooden Reel	W75 x H46cm	1R	

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

MCP7051SSWA-150226.docx

made by





garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**
www.madisontech.com.au/garland

MCP7051SSWA-150226.docx

made by



madison