

Smart Scan Sensor

SMARTSCAN2

- Recessed Flush Mount 360 degree PIR Presence Sensor with one & two channel control module option
- Patented push to reveal sensor controls for simple setup and reliable operation
- 2 channel modules allow the sequence control of multiple appliances such as bathroom lights & fans



Performance

Operating Temperature	-10°C to 50°C
Ingress Protection Rating	IP20
Warranty	2 Years

Physical

Dimensions	L60 x W45 x H130.50mm
Weight	0.22kg
Installation	Recessed

Sensor

Optical Fields of View (FOV)	864
Sensor Type	HD PIR
Integrated Light Level	Yes
Sensor Height Max	7m
Sensor Length Max	2m


Electrical

Voltage	240V
Line Voltage Frequency	50Hz/60Hz
Electrical Rating	Class 2


Nightlight

field of view	864
---------------	-----

Line Drawings

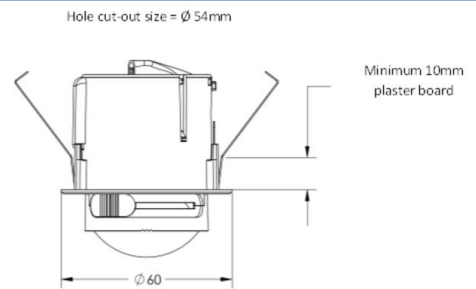

Product Images



*Rated LED design life where stated is based upon application of Pierlite's operating and maintenance guidelines; see pierlite.com.au. Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. Gerard Lighting Pty Ltd standard Terms and Conditions apply